


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.9V I:1.322A P:301.0W PF:0.990 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:54901.6x1 lm		
NAME: LHB09-300H-5070-L00403	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 182.38 lm/W			
MODEL	/	Imax (cd)	25873	S/MH (C0/180)	1.23
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	1.15
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	54902	η UP,DN (C0-180)	0.0,50.0
NOMINAL FLUX (lm)	54901.6	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

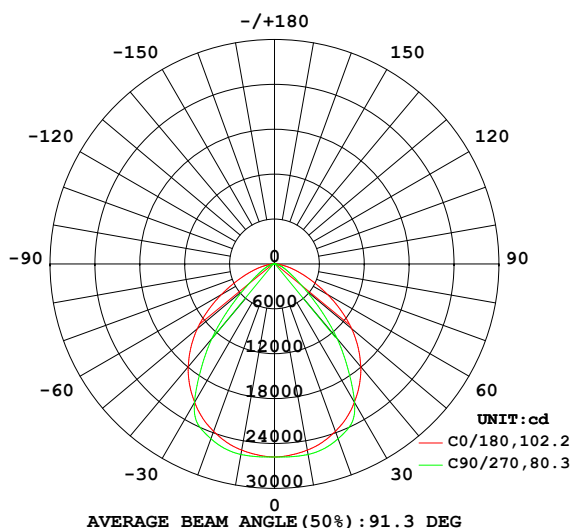

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

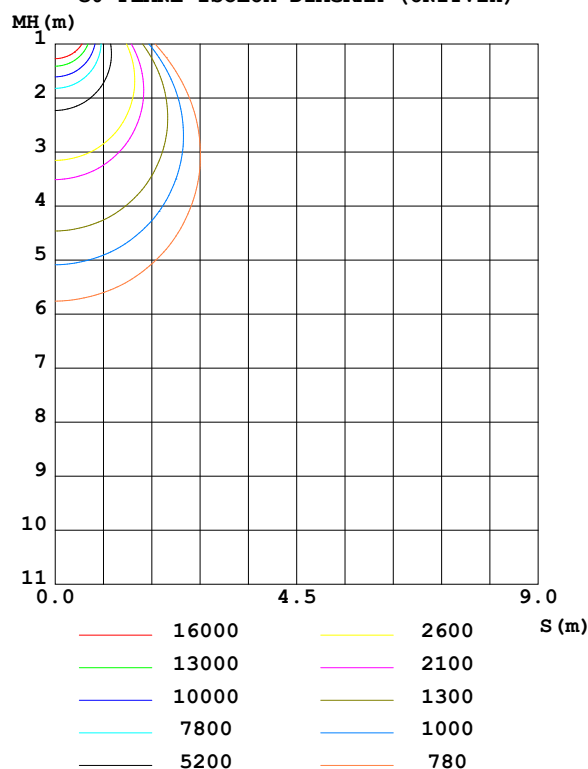

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2526	2559	2586	2559	2526	2559	2586	2559	0- 10	2453	2453	4.47,4.47
20	2381	2458	2486	2458	2381	2458	2486	2458	10- 20	7106	9559	17.4,17.4
30	2135	2218	2140	2218	2135	2218	2140	2218	20- 30	10774	20333	37,37
40	1794	1783	1304	1783	1794	1783	1304	1783	30- 40	12082	32416	59,59
50	1346	1079	543.7	1079	1346	1079	543.7	1079	40- 50	10249	42665	77.7,77.7
60	821.1	513.2	220.1	513.2	821.1	513.2	220.1	513.2	50- 60	6693	49357	89.9,89.9
70	388.2	227.3	102.4	227.3	388.2	227.3	102.4	227.3	60- 70	3624	52982	96.5,96.5
80	126.8	73.84	32.86	73.84	126.8	73.84	32.86	73.84	70- 80	1604	54586	99.4,99.4
90	0.9578	0.5928	0.9454	0.5928	0.9578	0.5928	0.9454	0.5928	80- 90	315.8	54902	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 37935 lm

%lum = 69.1%

%lamp = 69.1%

Conical surface Flux(120deg): 49357 lm


%lum = 89.9%

%lamp = 89.9%

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

LUMINANCE LIMITATION CURVES

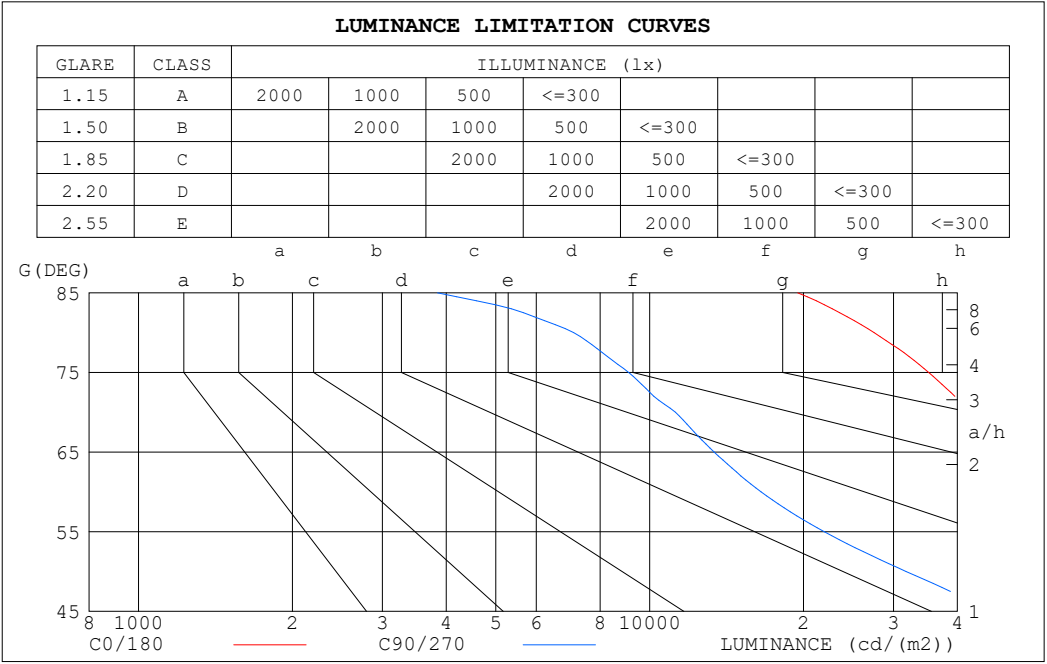

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	19490	3845
80	27483	7102
75	35156	9097
70	42723	11232
65	51816	13374
60	61809	16523
55	71276	21961
50	78835	31744
45	84159	46919

C Range: 0 - 360DEG

C Interval: 10.0DEG

Test Speed: HIGH

Temperature:25.3℃

Operators:LYJ

Test Date:2022-08-02

γ Range: 0 - 90DEG

γ Interval: 0.5DEG

Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446

Humidity:65.0%


Test Distance:26.000m [K=0.4548]

Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.03	1.00	1.05	1.01	.99	1.00	.98	.95	.97	.95	.93	.93	.91	.90	.88
2.0	.95	.90	.85	.94	.88	.84	.90	.86	.82	.87	.83	.80	.84	.81	.78	.76
3.0	.85	.78	.73	.84	.77	.72	.81	.76	.71	.78	.74	.70	.76	.72	.69	.67
4.0	.77	.69	.63	.76	.68	.63	.73	.67	.62	.71	.66	.61	.69	.64	.61	.59
5.0	.70	.62	.56	.69	.61	.55	.67	.60	.55	.65	.59	.54	.63	.58	.54	.52
6.0	.63	.55	.50	.62	.55	.49	.61	.54	.49	.59	.53	.48	.58	.52	.48	.46
7.0	.58	.50	.44	.57	.50	.44	.56	.49	.44	.54	.48	.44	.53	.48	.43	.41
8.0	.53	.45	.40	.53	.45	.40	.51	.45	.40	.50	.44	.39	.49	.43	.39	.37
9.0	.49	.41	.36	.49	.41	.36	.47	.41	.36	.46	.40	.36	.45	.40	.36	.34
10.0	.45	.38	.33	.45	.38	.33	.44	.38	.33	.43	.37	.33	.42	.37	.33	.31

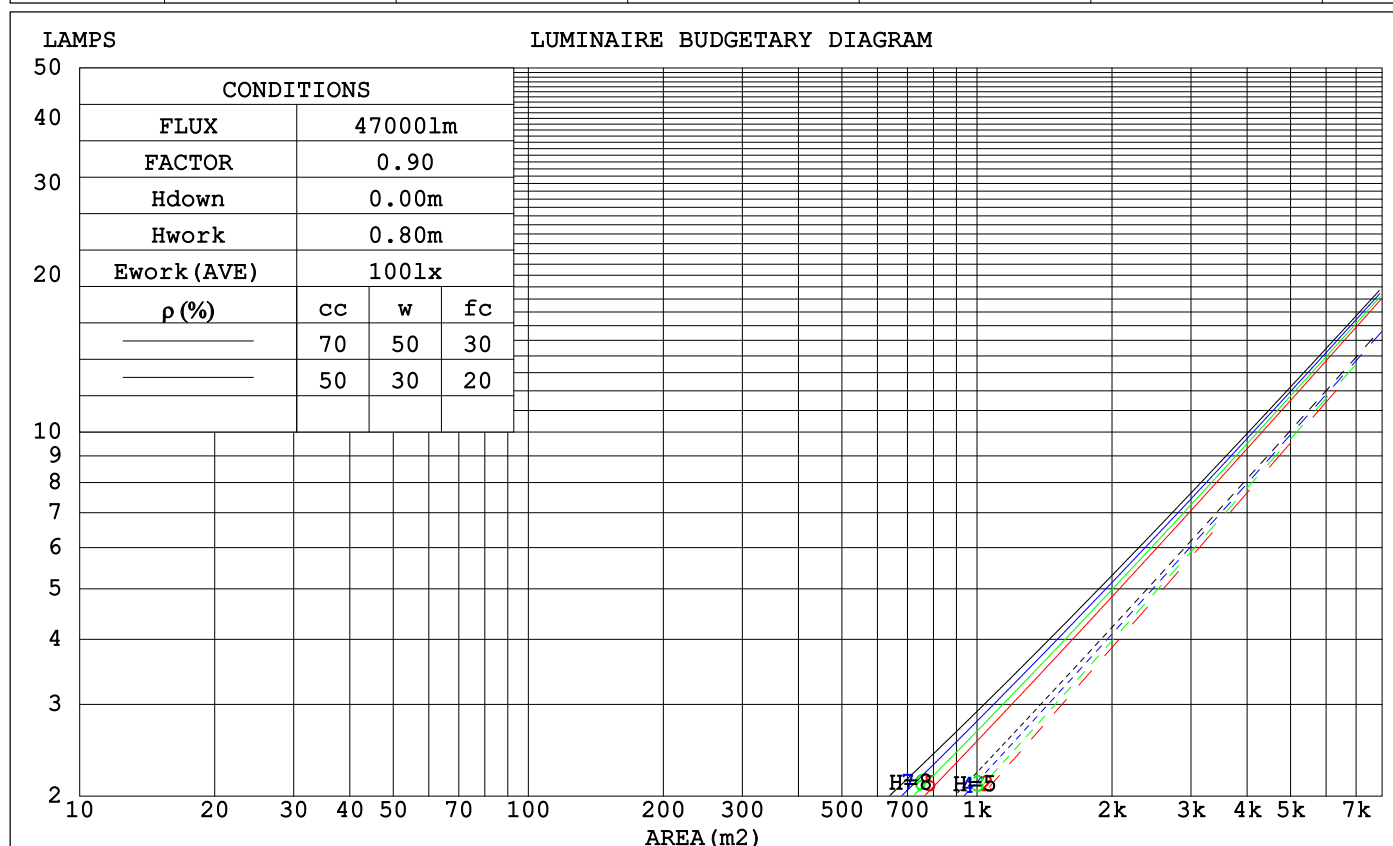

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4548]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.253	.144	.046	.246	.140	.045	.233	.134	.043	.221	.127	.041	.210	.122	.039		
2.0	.244	.134	.041	.238	.131	.040	.227	.126	.039	.216	.121	.038	.207	.117	.037		
3.0	.231	.123	.037	.226	.121	.036	.216	.117	.036	.207	.113	.035	.198	.110	.034		
4.0	.217	.113	.033	.212	.111	.033	.204	.108	.032	.196	.105	.032	.188	.102	.031		
5.0	.204	.104	.030	.200	.102	.030	.192	.100	.029	.185	.097	.029	.178	.095	.029		
6.0	.191	.096	.027	.188	.095	.027	.181	.093	.027	.175	.091	.027	.169	.089	.026		
7.0	.180	.089	.025	.177	.088	.025	.171	.086	.025	.165	.085	.025	.160	.083	.024		
8.0	.170	.083	.023	.167	.082	.023	.162	.081	.023	.156	.079	.023	.151	.078	.023		
9.0	.161	.078	.022	.158	.077	.022	.153	.076	.021	.148	.074	.021	.144	.073	.021		
10.0	.152	.073	.020	.150	.072	.020	.145	.071	.020	.141	.070	.020	.137	.069	.020		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.176	.157	.139	.151	.134	.120	.103	.092	.083	.059	.054	.048	.019	.017	.016	
2.0	.166	.132	.104	.142	.114	.090	.097	.079	.063	.056	.046	.037	.018	.015	.012	
3.0	.157	.114	.080	.135	.098	.069	.092	.068	.049	.053	.040	.029	.017	.013	.009	
4.0	.149	.100	.063	.128	.087	.055	.088	.060	.039	.051	.035	.023	.016	.012	.008	
5.0	.142	.090	.051	.122	.077	.044	.084	.054	.031	.049	.032	.019	.016	.010	.006	
6.0	.135	.081	.042	.116	.070	.037	.080	.049	.026	.046	.029	.016	.015	.009	.005	
7.0	.128	.074	.036	.110	.064	.031	.076	.045	.022	.044	.026	.013	.014	.009	.004	
8.0	.122	.068	.031	.105	.059	.027	.073	.041	.019	.042	.024	.011	.014	.008	.004	
9.0	.117	.063	.027	.101	.055	.023	.070	.039	.017	.041	.023	.010	.013	.007	.003	
10.0	.112	.059	.024	.096	.051	.021	.067	.036	.015	.039	.021	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4548]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	27.0	28.4	27.4	28.7	29.1	19.3	20.8	19.7	21.1	21.4
3H	28.1	29.4	28.5	29.7	30.1	20.1	21.4	20.5	21.7	22.1
4H	28.4	29.6	28.8	30.0	30.4	20.3	21.5	20.7	21.9	22.3
6H	28.6	29.7	29.0	30.1	30.5	20.5	21.6	20.9	21.9	22.3
8H	28.7	29.7	29.1	30.1	30.5	20.5	21.5	20.9	21.9	22.3
12H	28.7	29.7	29.1	30.1	30.5	20.5	21.5	20.9	21.8	22.3
4H 2H	27.0	28.2	27.4	28.6	28.9	20.8	22.0	21.2	22.3	22.7
3H	28.3	29.3	28.7	29.7	30.1	21.6	22.6	22.0	23.0	23.4
4H	28.8	29.7	29.2	30.1	30.5	21.9	22.8	22.3	23.2	23.6
6H	29.1	29.9	29.6	30.3	30.8	22.0	22.8	22.5	23.2	23.7
8H	29.2	29.9	29.6	30.3	30.8	22.0	22.8	22.5	23.2	23.7
12H	29.2	29.8	29.7	30.3	30.8	22.0	22.7	22.5	23.1	23.6
8H 4H	28.8	29.5	29.2	29.9	30.4	22.5	23.3	23.0	23.7	24.2
6H	29.1	29.7	29.6	30.2	30.7	22.7	23.3	23.2	23.8	24.3
8H	29.2	29.8	29.8	30.3	30.8	22.8	23.3	23.3	23.8	24.3
12H	29.3	29.8	29.8	30.3	30.9	22.8	23.2	23.3	23.7	24.3
12H 4H	28.7	29.4	29.2	29.8	30.3	22.6	23.3	23.1	23.8	24.2
6H	29.1	29.6	29.6	30.1	30.6	22.9	23.4	23.4	23.9	24.4
8H	29.2	29.7	29.7	30.2	30.8	22.9	23.4	23.4	23.9	24.5
CIE190: 2010										

CIE190: 2010
Area: 0.26645 m2

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	66	56	50	65	55	49	64	55	49	44
0.80	76	66	60	75	65	59	73	65	59	53
1.00	84	74	68	83	74	68	81	75	68	62
1.25	90	82	76	89	81	75	86	80	75	68
1.50	95	87	81	93	86	80	90	84	79	73
2.00	100	93	88	99	92	87	95	90	86	79
2.50	103	97	92	101	96	91	98	93	89	82
3.00	106	101	96	104	99	95	100	96	93	85
4.00	109	105	101	107	103	100	103	100	97	89
5.00	111	107	104	109	105	102	104	102	99	91
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: LYJ
 Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4548]
 Remarks:


ISOCANDELA DIAGRAM

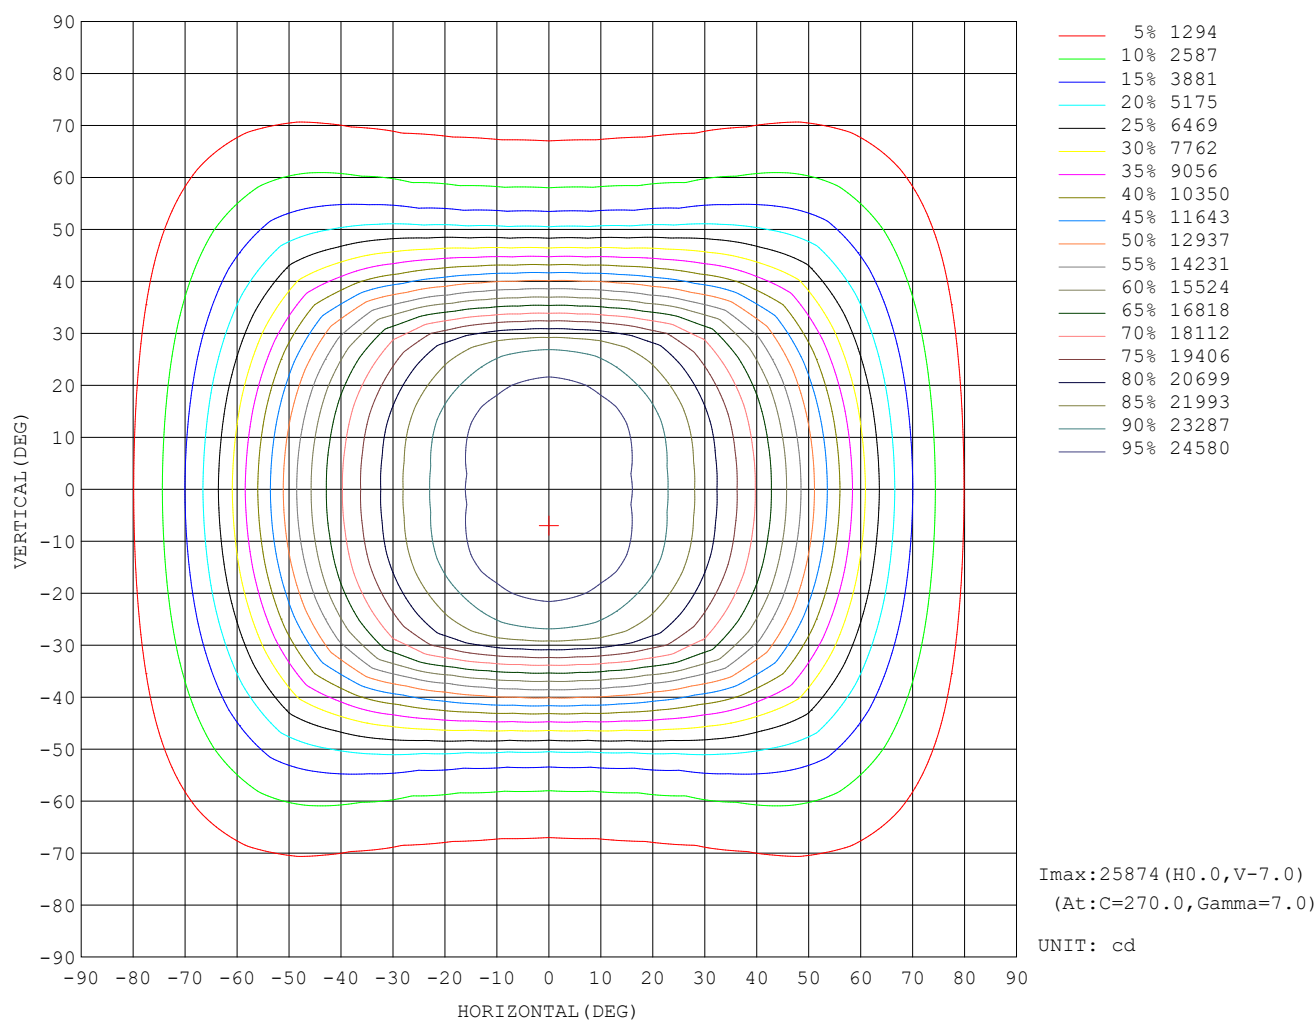

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

AAI Figure

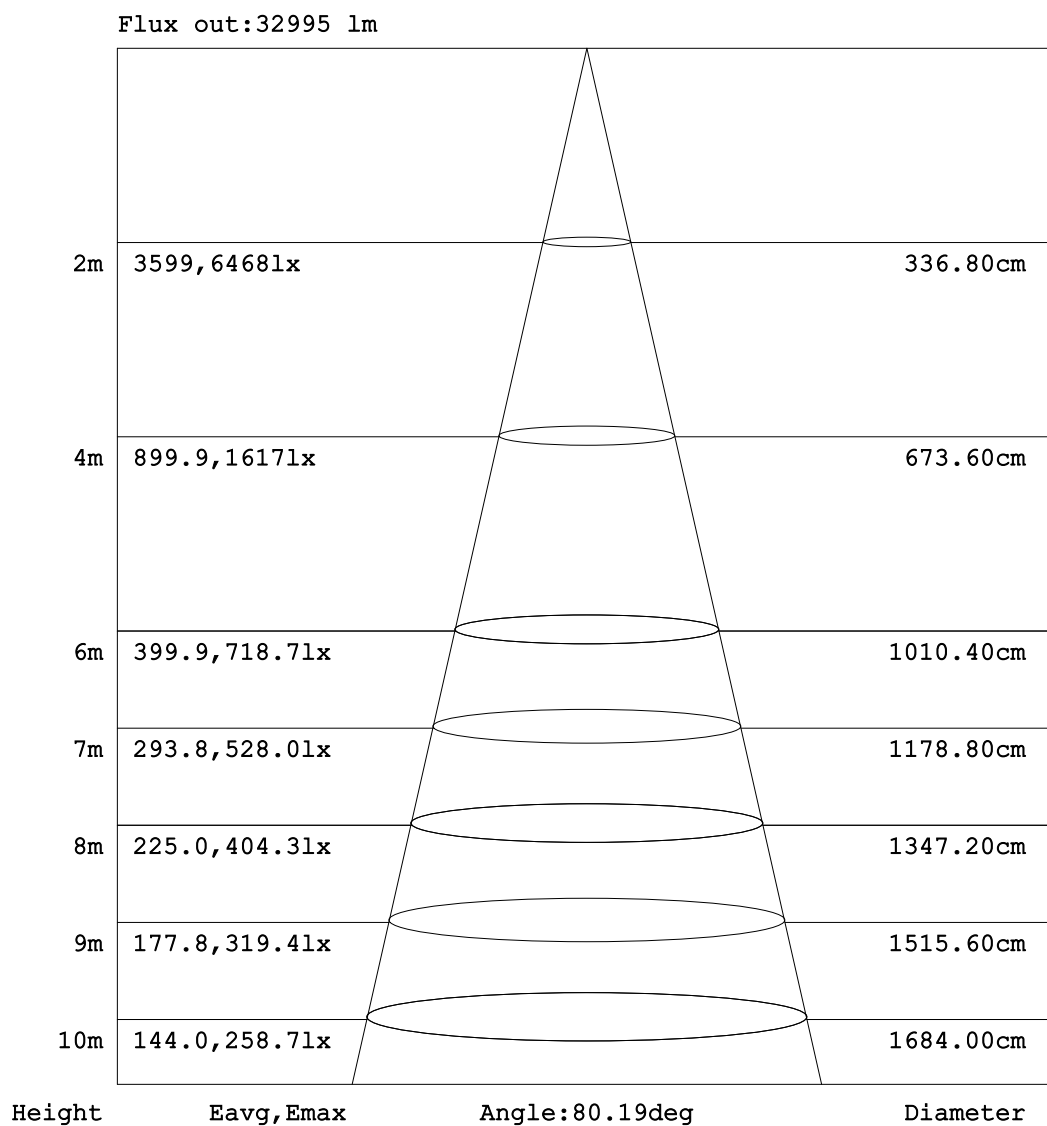


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOLUX DIAGRAM

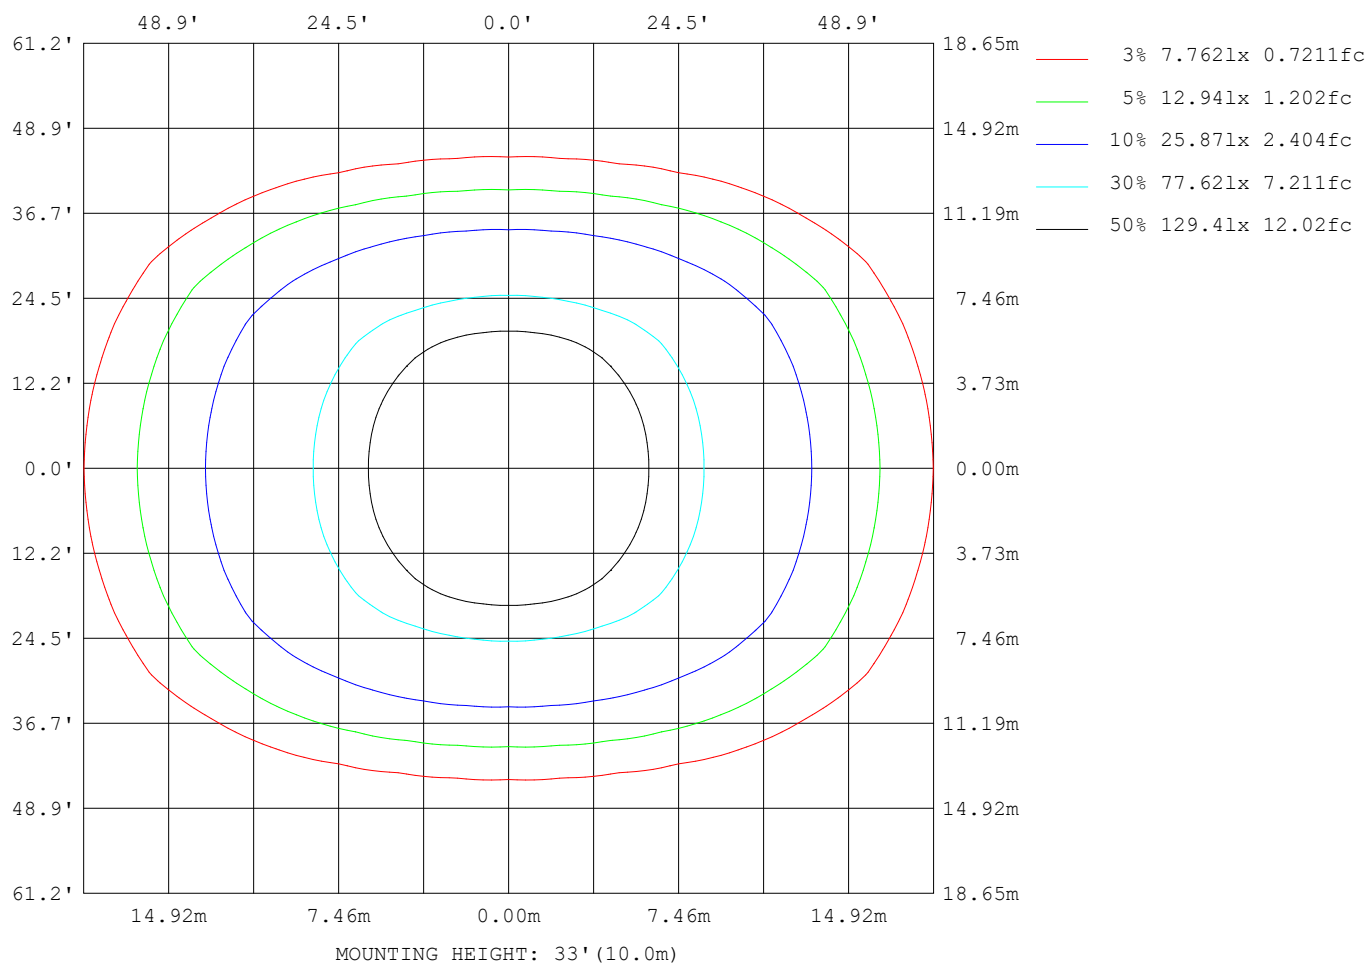

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

Planar Illuminance Curve

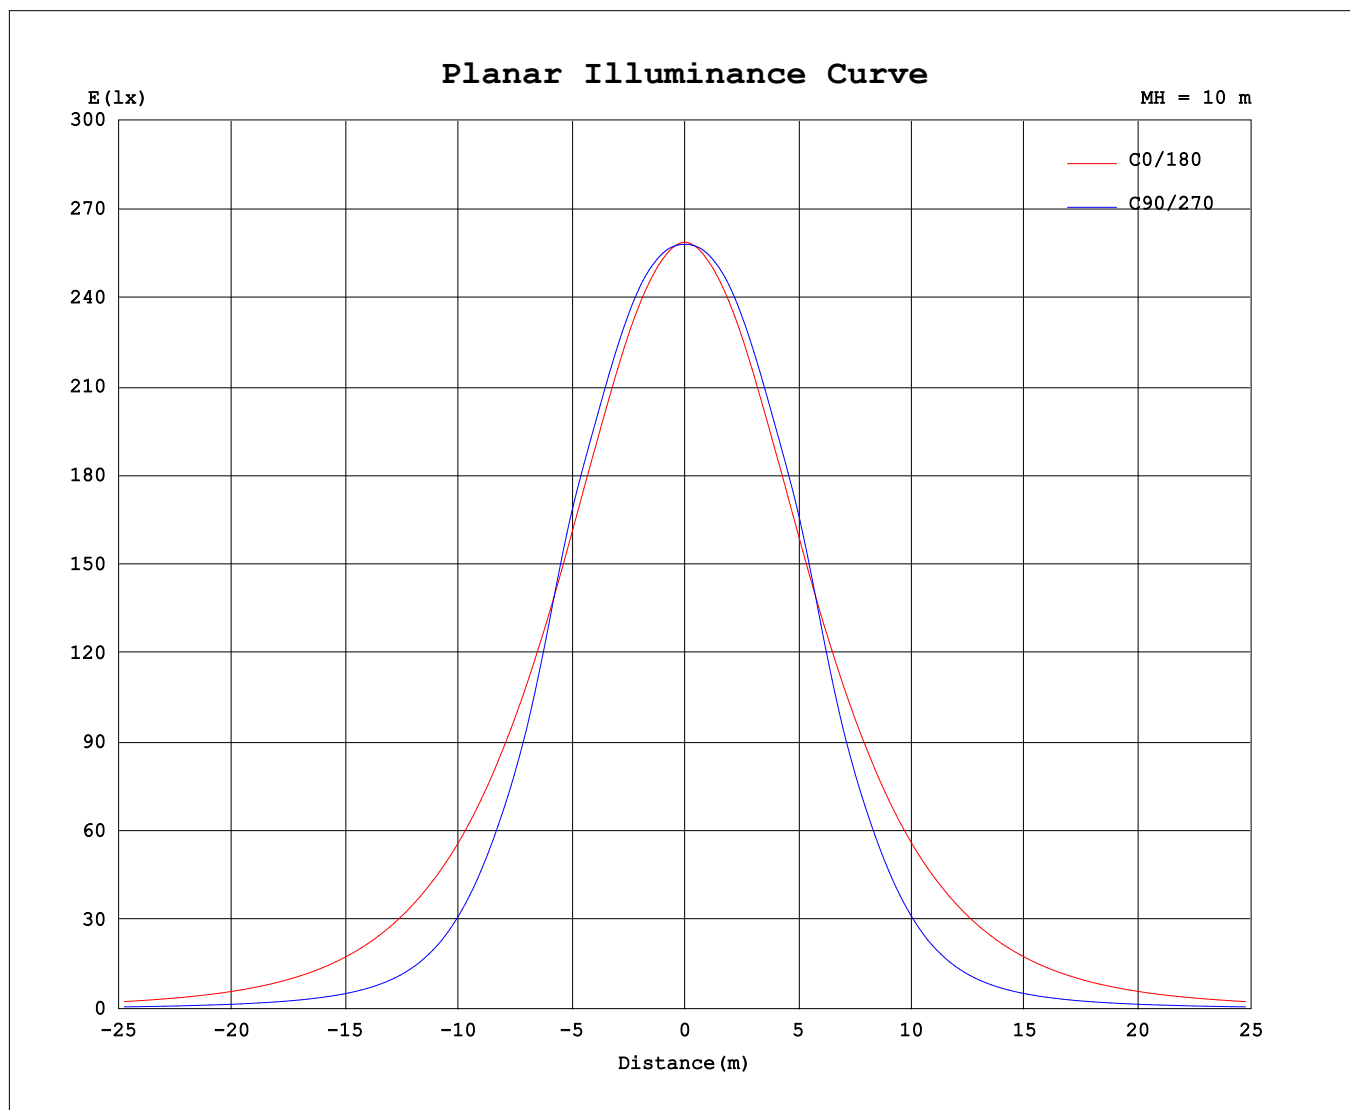

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

UNIT: X10cd

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 10.0DEG	γ Interval: 0.5DEG
Test Speed: HIGH	Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Temperature: 25.3°C	Humidity: 65.0%
Operators: LYJ	Test Distance: 26.000m [K=0.4548]
Test Date: 2022-08-02	Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

UNIT: X10cd

[illegible]

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

```