


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.0V I:1.054A P:240.0W PF:0.990 Freq:50.00Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:38536x1 lm		
NAME: HB74-240-5080-H00221	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 160.57 lm/W			
MODEL	/	I _{max} (cd)	31254	S/MH (C0/180)	0.92
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	0.92
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	38536	η UP, DN (C0-180)	0.0, 50.0
NOMINAL FLUX (lm)	38536	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

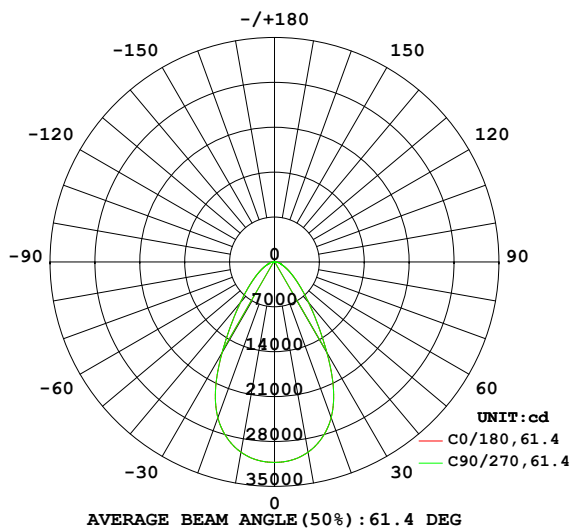

PLANAR ISOLUX DIAGRAM (UNIT:lx)

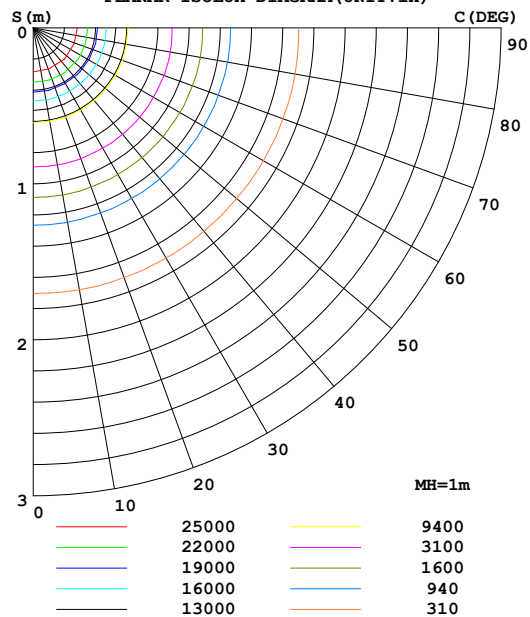

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-09-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3012	3012	3012	3012	3012	3012	3012	3012	0- 10	2932	2932	7.61,7.61
20	2584	2584	2584	2584	2584	2584	2584	2584	10- 20	7958	10890	28.3,28.3
30	1637	1637	1637	1637	1637	1637	1637	1637	20- 30	9819	20709	53.7,53.7
40	828.9	828.9	828.9	828.9	828.9	828.9	828.9	828.9	30- 40	7349	28058	72.8,72.8
50	433.6	433.6	433.6	433.6	433.6	433.6	433.6	433.6	40- 50	4667	32725	84.9,84.9
60	232.2	232.2	232.2	232.2	232.2	232.2	232.2	232.2	50- 60	2880	35606	92.4,92.4
70	113.0	113.0	113.0	113.0	113.0	113.0	113.0	113.0	60- 70	1652	37258	96.7,96.7
80	60.16	60.16	60.16	60.16	60.16	60.16	60.16	60.16	70- 80	969.7	38227	99.2,99.2
90	2.205	2.205	2.205	2.205	2.205	2.205	2.205	2.205	80- 90	308.6	38536	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 30668 lm

%lum = 79.6%

%lamp = 79.6%

Conical surface Flux(130deg): 36561 lm


%lum = 94.9%

%lamp = 94.9%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

LUMINANCE LIMITATION CURVES

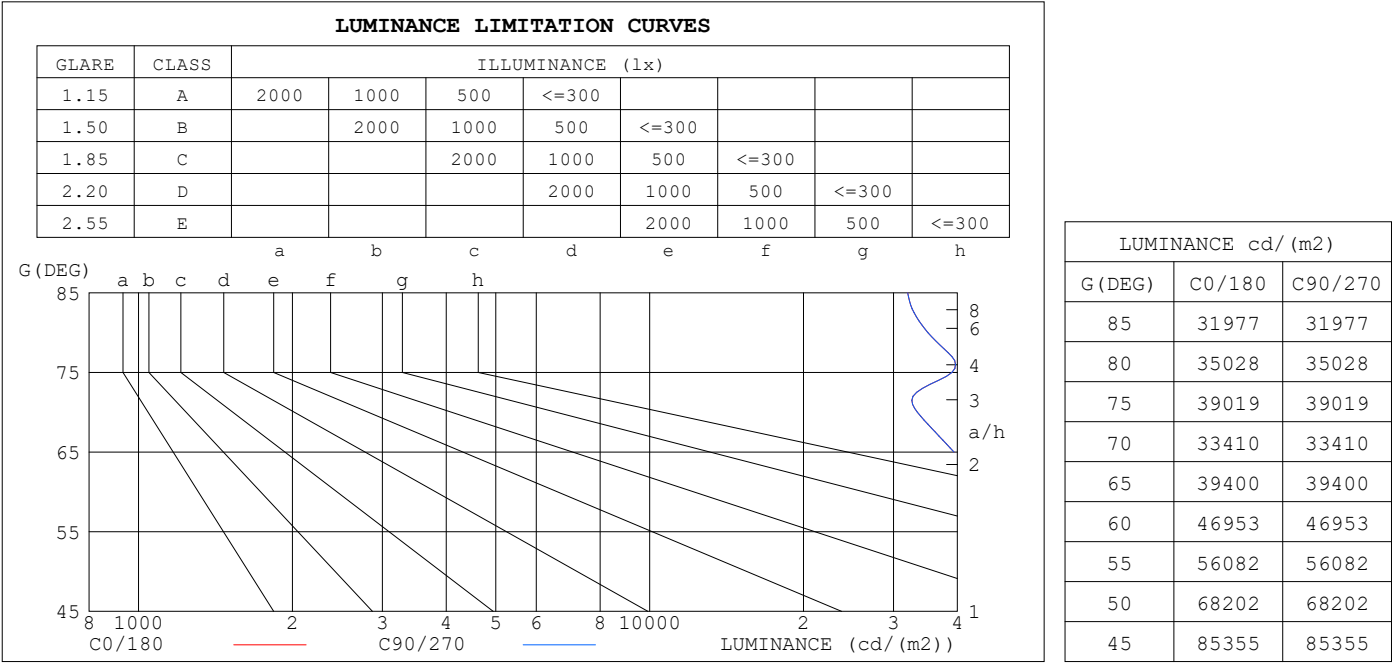


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:ZZX
Test Date:2023-09-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

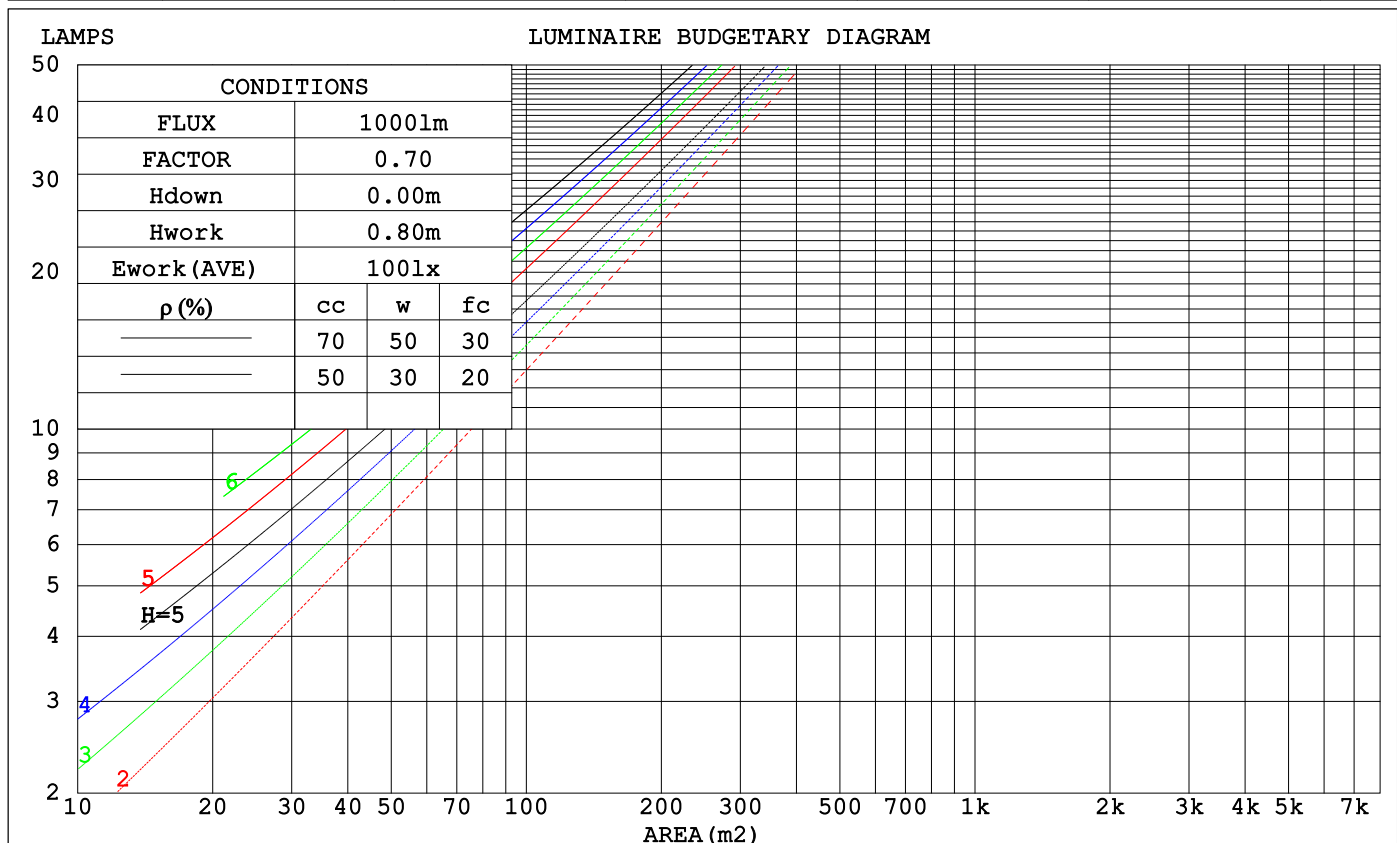

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:ZZX
 Test Date:2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4559]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)									
0.0																
1.0	.228	.130	.041	.221	.126	.040	.208	.120	.038	.197	.113	.036	.186	.108	.035	
2.0	.217	.119	.036	.211	.116	.036	.200	.111	.035	.190	.106	.033	.180	.102	.032	
3.0	.204	.109	.033	.199	.107	.032	.189	.103	.031	.180	.099	.030	.172	.095	.030	
4.0	.192	.100	.029	.187	.098	.029	.179	.095	.028	.171	.092	.028	.164	.089	.027	
5.0	.180	.092	.027	.176	.090	.026	.169	.088	.026	.162	.086	.025	.156	.083	.025	
6.0	.170	.085	.024	.166	.084	.024	.160	.082	.024	.154	.080	.023	.148	.078	.023	
7.0	.160	.079	.022	.157	.078	.022	.152	.077	.022	.146	.075	.022	.141	.073	.022	
8.0	.152	.074	.021	.149	.073	.021	.144	.072	.021	.139	.070	.020	.134	.069	.020	
9.0	.144	.070	.019	.142	.069	.019	.137	.068	.019	.133	.066	.019	.128	.065	.019	
10.0	.137	.066	.018	.135	.065	.018	.131	.064	.018	.127	.063	.018	.123	.062	.018	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.175	.157	.141	.149	.135	.121	.102	.093	.084	.059	.054	.049	.019	.017	.016	
2.0	.162	.132	.107	.139	.114	.093	.095	.079	.065	.055	.046	.038	.018	.015	.012	
3.0	.152	.114	.084	.130	.098	.073	.089	.068	.051	.052	.040	.030	.017	.013	.010	
4.0	.143	.100	.067	.122	.086	.058	.084	.060	.041	.049	.035	.024	.016	.011	.008	
5.0	.135	.089	.055	.116	.077	.048	.080	.054	.034	.046	.031	.020	.015	.010	.007	
6.0	.127	.080	.045	.109	.069	.040	.076	.048	.028	.044	.028	.017	.014	.009	.005	
7.0	.121	.072	.038	.104	.063	.034	.072	.044	.024	.042	.026	.014	.013	.008	.005	
8.0	.115	.066	.033	.099	.058	.029	.068	.040	.020	.040	.024	.012	.013	.008	.004	
9.0	.110	.061	.029	.094	.053	.025	.065	.037	.018	.038	.022	.011	.012	.007	.004	
10.0	.105	.057	.025	.090	.049	.022	.063	.035	.016	.036	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:ZZX
 Test Date:2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity:65.0%
 Test Distance:26.000m [K=0.4559]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.6	23.7	24.9	25.2	23.3	24.6	23.7	24.9	25.2
3H	24.4	25.5	24.8	25.9	26.2	24.4	25.5	24.8	25.9	26.2
4H	25.0	26.1	25.4	26.4	26.8	25.0	26.1	25.4	26.4	26.8
6H	25.5	26.5	25.9	26.9	27.3	25.5	26.5	25.9	26.9	27.3
8H	25.7	26.6	26.1	27.0	27.4	25.7	26.6	26.1	27.0	27.4
12H	25.8	26.7	26.2	27.0	27.5	25.8	26.7	26.2	27.0	27.5
4H 2H	23.7	24.7	24.1	25.1	25.5	23.7	24.7	24.1	25.1	25.5
3H	24.9	25.8	25.3	26.2	26.6	24.9	25.8	25.3	26.2	26.6
4H	25.8	26.5	26.2	26.9	27.4	25.8	26.5	26.2	26.9	27.4
6H	26.4	27.1	26.9	27.5	28.0	26.4	27.1	26.9	27.5	28.0
8H	26.6	27.3	27.1	27.7	28.2	26.6	27.3	27.1	27.7	28.2
12H	26.8	27.3	27.3	27.8	28.3	26.8	27.3	27.3	27.8	28.3
8H 4H	26.0	26.7	26.5	27.1	27.6	26.0	26.7	26.5	27.1	27.6
6H	26.8	27.3	27.3	27.8	28.3	26.8	27.3	27.3	27.8	28.3
8H	27.1	27.6	27.6	28.1	28.6	27.1	27.6	27.6	28.1	28.6
12H	27.4	27.8	27.9	28.3	28.8	27.4	27.8	27.9	28.3	28.8
12H 4H	26.0	26.6	26.5	27.1	27.6	26.0	26.6	26.5	27.1	27.6
6H	26.9	27.3	27.4	27.8	28.4	26.9	27.3	27.4	27.8	28.4
8H	27.2	27.6	27.7	28.1	28.7	27.2	27.6	27.7	28.1	28.7
CIE190: 2010										

CIE190: 2010
Area: 0.0989 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	75	66	61	74	66	61	73	65	61	56
0.80	83	75	70	83	75	70	81	74	69	64
1.00	90	82	77	89	81	77	87	82	76	71
1.25	95	88	83	94	87	83	92	86	82	76
1.50	99	92	87	97	91	87	95	90	86	80
2.00	103	97	93	102	96	92	99	94	91	84
2.50	106	100	96	104	99	95	101	97	93	87
3.00	108	103	99	106	102	98	102	99	96	89
4.00	111	107	104	109	105	102	105	102	100	92
5.00	112	109	106	110	107	105	106	104	102	93
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: ZZX
 Test Date: 2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4559]
 Remarks:


ISOCANDELA DIAGRAM

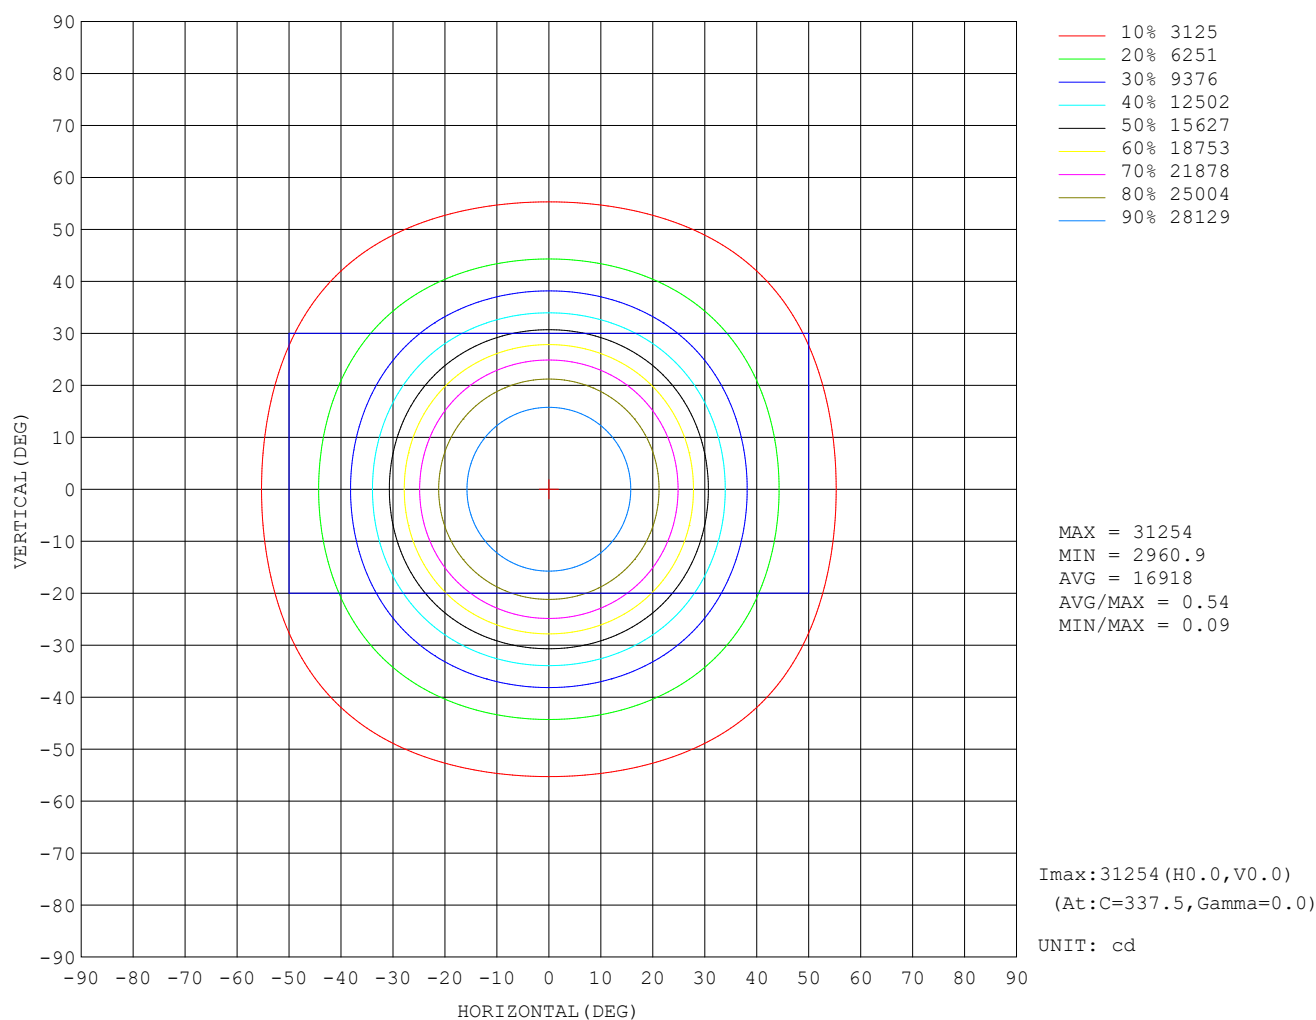

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZK
Test Date: 2023-09-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

AAI Figure

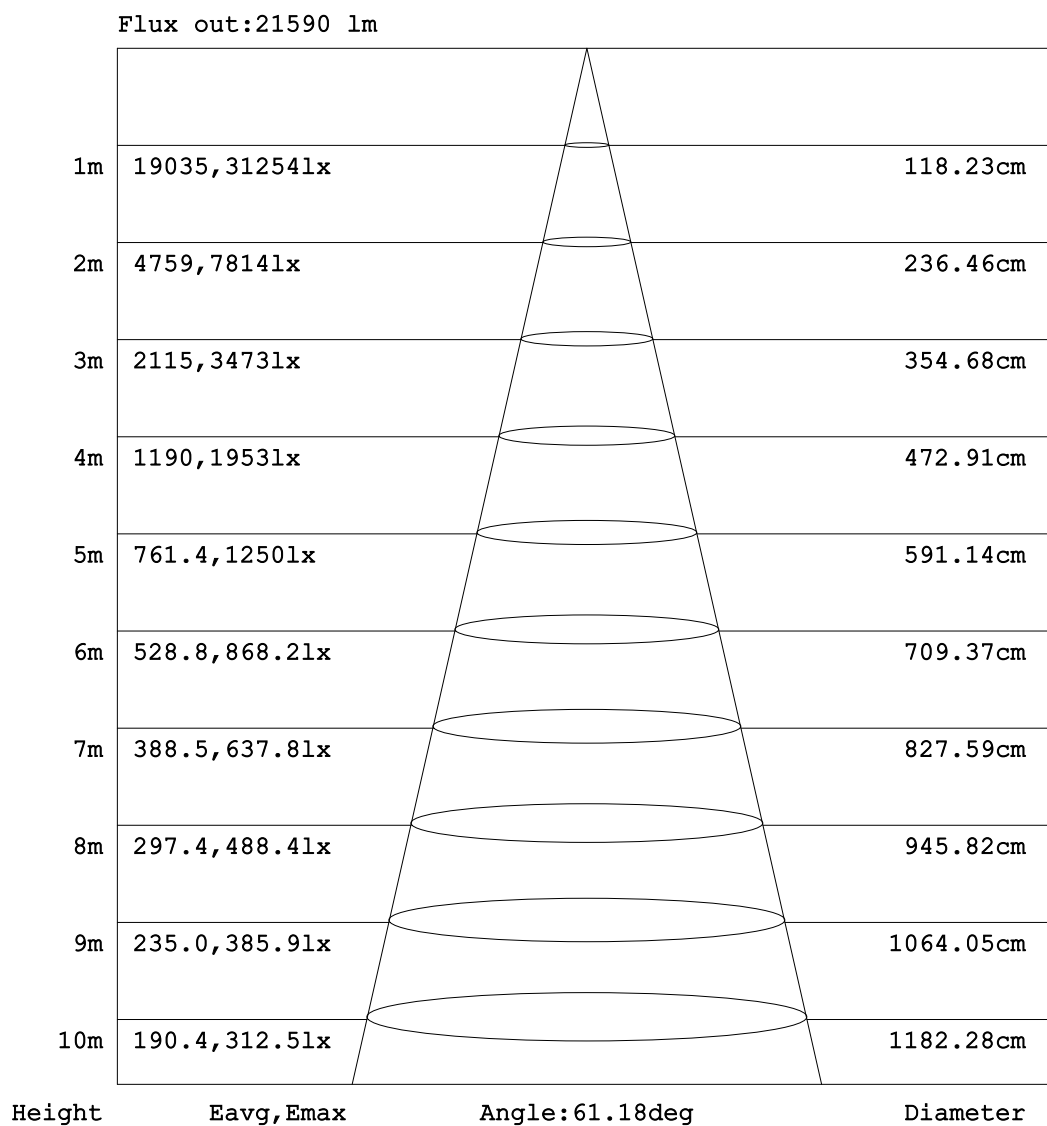


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:ZZX
Test Date:2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ISOLUX DIAGRAM

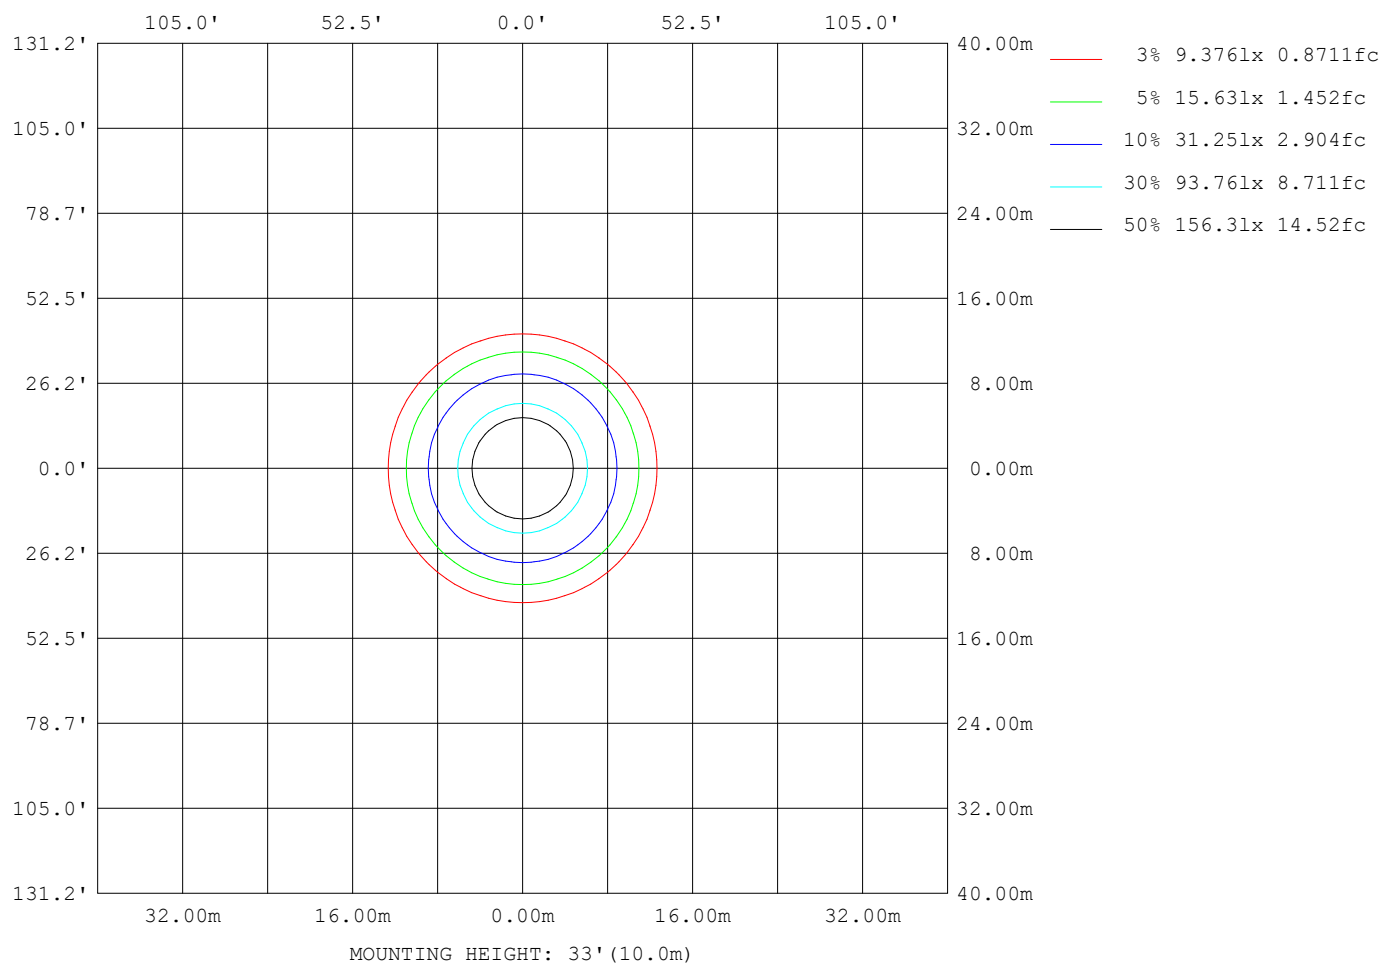

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LED Avg.L Report

Test:U:230.0V I:1.054A P:240.0W PF:0.990 Freq:50.00Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:38536x1 lm		
NAME: HB74-240-5080-H00221	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	39400
L_0~180 (75) av	39019
L_0~180 (85) av	31977
L_90~270 (65) av	39400
L_90~270 (75) av	39019
L_90~270 (85) av	31977
L_45 (65) av	39400
L_45 (75) av	39019
L_45 (85) av	31977

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:ZZX
Test Date:2023-09-27

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

Planar Illuminance Curve

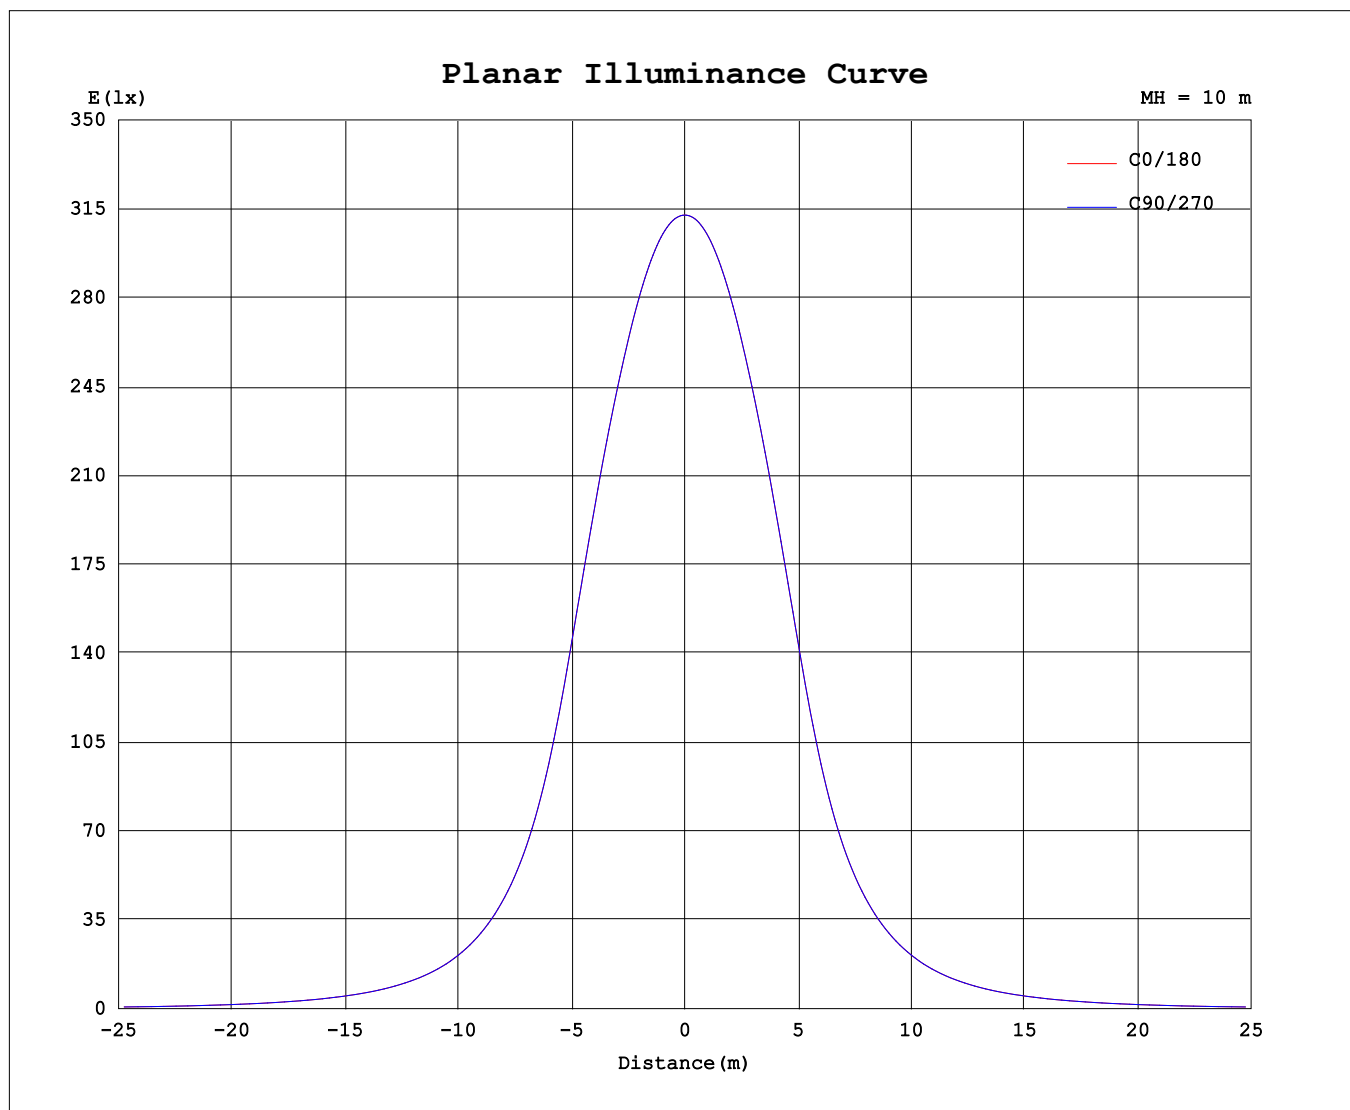

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: ZZX
Test Date: 2023-09-27

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity: 65.0%
Test Distance: 26.000m [K=0.4559]
Remarks:

UNIT: X10cd

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.465
Humidity:65.0%
Test Distance:26.000m [K=0.4559]
Remarks:

```