


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:229.9V I:2.109A P:478.5W PF:0.987 Freq:50.01Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:83749x1 lm		
NAME: LHB09-480H-5070-L00401	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 175.01 lm/W			
MODEL	/	I _{max} (cd)	91992	S/MH (C0/180)	1.18
NOMINAL POWER (W)	/	LOR (%)	100.0	S/MH (C90/270)	0.41
RATED VOLTAGE (V)	/	TOTAL FLUX (lm)	83749	η UP, DN (C0-180)	0.0, 50.0
NOMINAL FLUX (lm)	83749	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	/	η down (%)	100.0	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

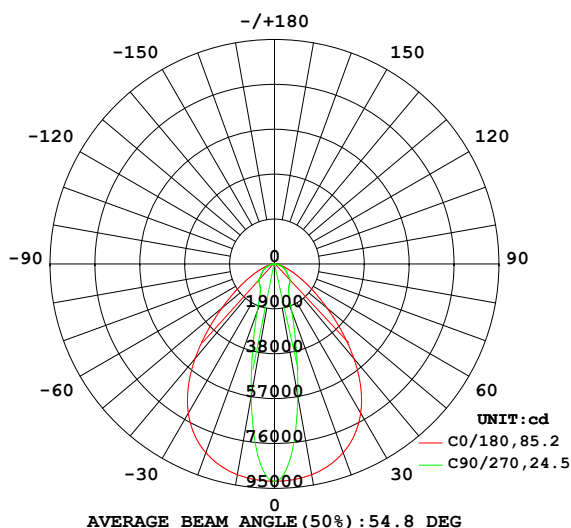

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

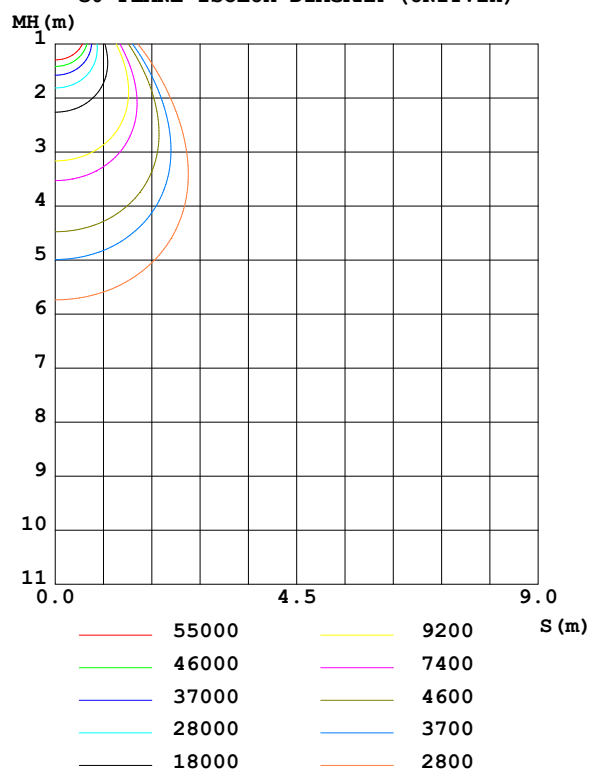

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	9058	7129	5683	7129	9058	7129	5683	7129	0- 10	7788	7788	9.3,9.3
20	8499	3582	2142	3582	8499	3582	2142	3582	10- 20	15841	23629	28.2,28.2
30	7294	1654	1205	1654	7294	1654	1205	1654	20- 30	15949	39578	47.3,47.3
40	5228	1048	1013	1048	5228	1048	1013	1048	30- 40	14209	53787	64.2,64.2
50	2909	830.3	748.8	830.3	2909	830.3	748.8	830.3	40- 50	11865	65652	78.4,78.4
60	1365	603.0	563.7	603.0	1365	603.0	563.7	603.0	50- 60	8751	74403	88.8,88.8
70	538.9	393.2	340.1	393.2	538.9	393.2	340.1	393.2	60- 70	5739	80142	95.7,95.7
80	170.1	157.8	122.3	157.8	170.1	157.8	122.3	157.8	70- 80	2951	83093	99.2,99.2
90	1.692	1.706	3.143	1.706	1.692	1.706	3.143	1.706	80- 90	656.2	83749	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 60068 lm

%lum = 71.7%

%lamp = 71.7%

Conical surface Flux(120deg): 74403 lm


%lum = 88.8%

%lamp = 88.8%

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

LUMINANCE LIMITATION CURVES

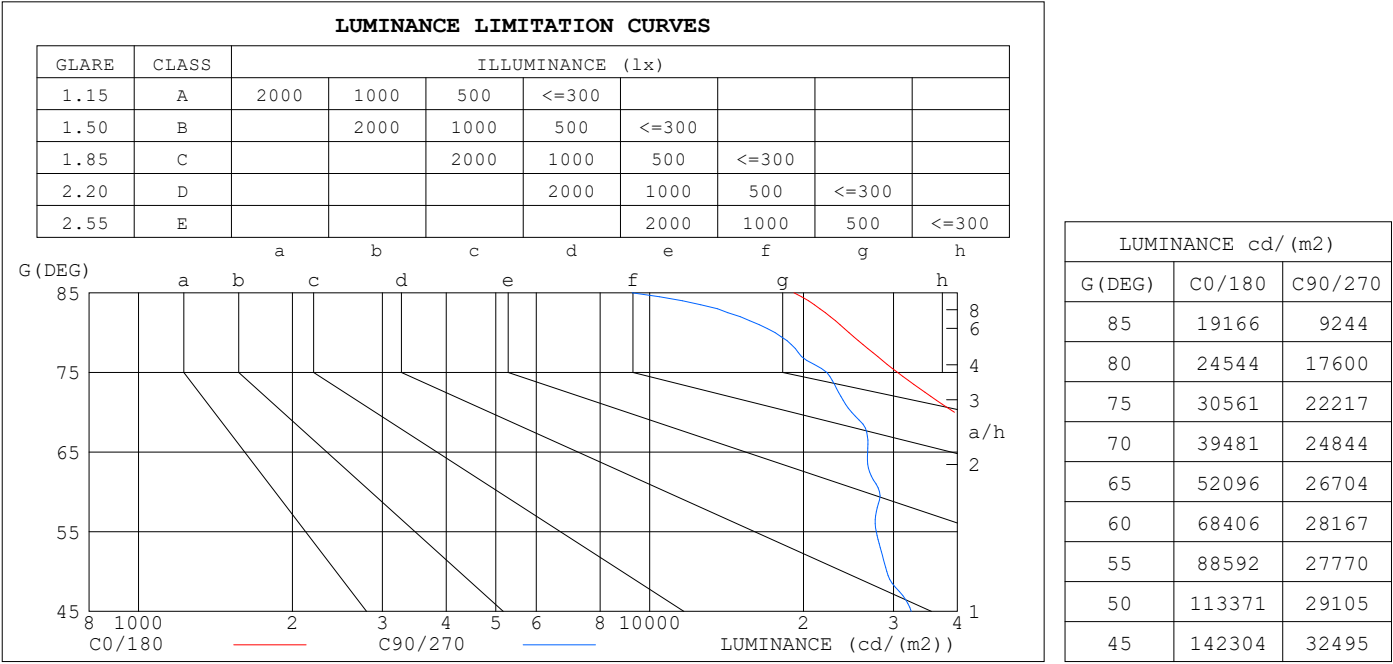


C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.07	1.04	1.01	1.05	1.02	.99	1.01	.98	.96	.97	.95	.93	.94	.92	.90	.89
2.0	.97	.91	.86	.95	.90	.85	.91	.87	.84	.88	.85	.82	.85	.82	.80	.78
3.0	.87	.81	.75	.86	.80	.75	.83	.78	.74	.81	.76	.72	.78	.74	.71	.69
4.0	.80	.72	.67	.78	.72	.66	.76	.70	.66	.74	.69	.65	.72	.68	.64	.62
5.0	.73	.66	.60	.72	.65	.60	.70	.64	.59	.68	.63	.59	.66	.62	.58	.56
6.0	.67	.60	.54	.66	.59	.54	.65	.58	.54	.63	.58	.53	.62	.57	.53	.51
7.0	.62	.55	.50	.62	.55	.50	.60	.54	.49	.59	.53	.49	.58	.53	.49	.47
8.0	.58	.51	.46	.58	.51	.46	.56	.50	.46	.55	.49	.45	.54	.49	.45	.43
9.0	.54	.47	.43	.54	.47	.42	.53	.47	.42	.52	.46	.42	.51	.46	.42	.40
10.0	.51	.44	.40	.51	.44	.40	.50	.44	.39	.49	.43	.39	.48	.43	.39	.38

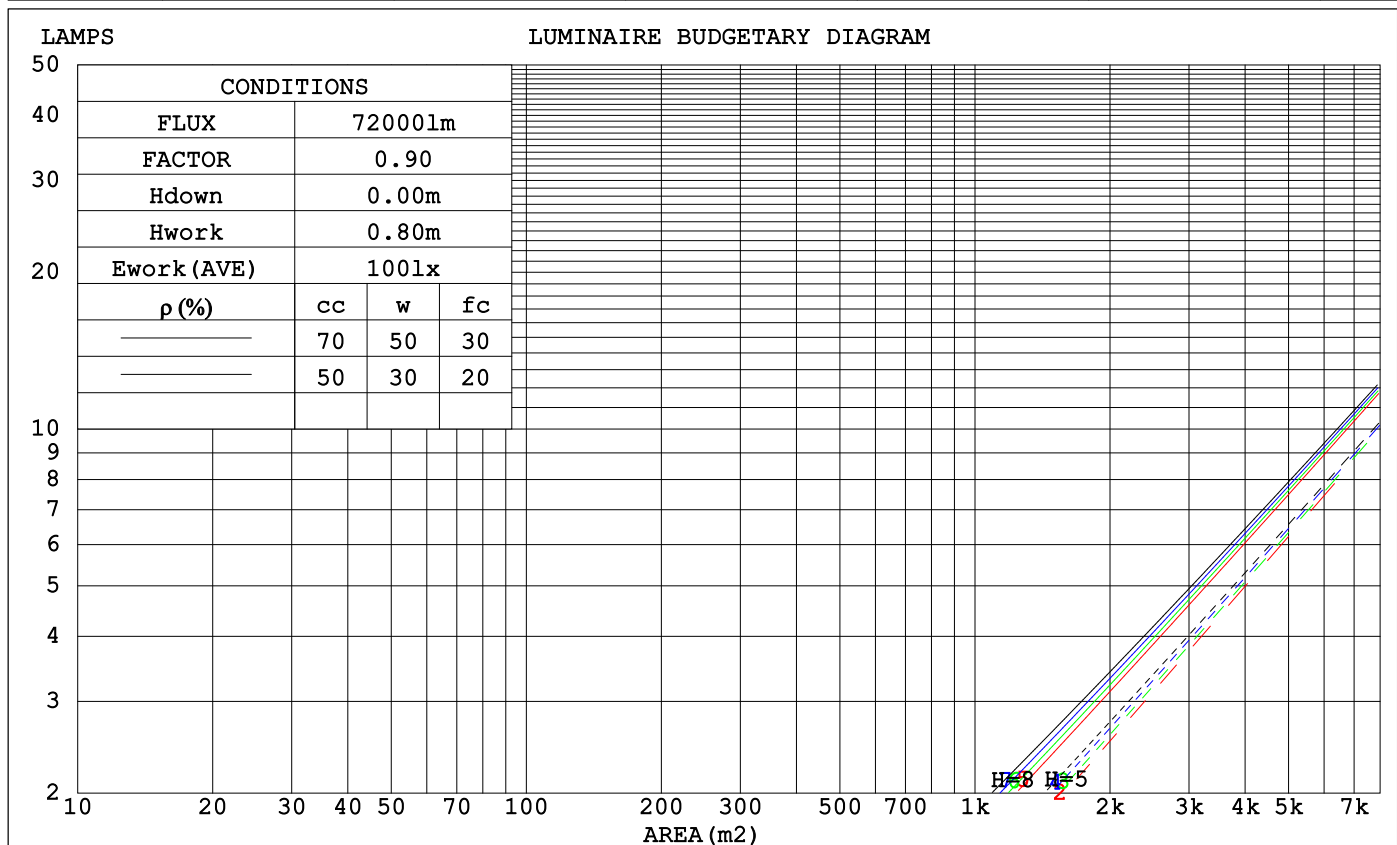

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:LYJ
 Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4548]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.244	.139	.044	.237	.135	.043	.225	.129	.041	.213	.123	.039	.202	.117	.038		
2.0	.233	.128	.039	.227	.125	.039	.216	.120	.037	.206	.115	.036	.196	.111	.035		
3.0	.218	.116	.035	.213	.114	.034	.203	.110	.034	.194	.107	.033	.186	.103	.032		
4.0	.204	.106	.031	.199	.104	.031	.191	.101	.030	.183	.098	.030	.176	.095	.029		
5.0	.191	.097	.028	.187	.096	.028	.179	.093	.027	.172	.091	.027	.166	.089	.027		
6.0	.179	.090	.026	.175	.088	.025	.168	.086	.025	.162	.084	.025	.156	.082	.024		
7.0	.168	.083	.024	.165	.082	.023	.159	.080	.023	.153	.079	.023	.148	.077	.023		
8.0	.158	.077	.022	.155	.076	.022	.150	.075	.021	.145	.073	.021	.140	.072	.021		
9.0	.149	.072	.020	.147	.071	.020	.142	.070	.020	.137	.069	.020	.133	.068	.020		
10.0	.141	.068	.019	.139	.067	.019	.135	.066	.019	.131	.065	.018	.127	.064	.018		

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.176	.157	.140	.150	.135	.120	.103	.093	.083	.059	.054	.048	.019	.017	.016		
2.0	.164	.132	.105	.141	.114	.091	.096	.079	.063	.056	.046	.037	.018	.015	.012		
3.0	.155	.114	.082	.132	.098	.071	.091	.068	.050	.053	.040	.029	.017	.013	.010		
4.0	.146	.100	.065	.125	.086	.057	.086	.060	.040	.050	.035	.024	.016	.011	.008		
5.0	.138	.089	.053	.118	.077	.046	.081	.054	.033	.047	.032	.019	.015	.010	.006		
6.0	.130	.080	.044	.112	.069	.038	.077	.049	.027	.045	.029	.016	.014	.009	.005		
7.0	.124	.073	.037	.106	.063	.033	.074	.044	.023	.043	.026	.014	.014	.009	.005		
8.0	.118	.067	.032	.101	.058	.028	.070	.041	.020	.041	.024	.012	.013	.008	.004		
9.0	.112	.062	.028	.096	.054	.025	.067	.038	.017	.039	.022	.010	.013	.007	.003		
10.0	.107	.058	.025	.092	.050	.022	.064	.035	.015	.037	.021	.009	.012	.007	.003		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:LYJ
 Test Date:2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4548]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.5	26.9	25.9	27.2	27.5	21.3	22.7	21.7	23.0	23.4
3H	27.1	28.3	27.5	28.7	29.0	23.2	24.4	23.6	24.8	25.1
4H	27.5	28.6	27.9	29.0	29.4	23.8	24.9	24.2	25.3	25.7
6H	27.7	28.8	28.1	29.2	29.5	24.1	25.2	24.5	25.6	26.0
8H	27.8	28.8	28.2	29.2	29.6	24.2	25.2	24.6	25.6	26.0
12H	27.8	28.8	28.2	29.1	29.6	24.2	25.2	24.6	25.6	26.0
4H 2H	25.6	26.8	26.0	27.1	27.5	22.1	23.2	22.5	23.6	24.0
3H	27.3	28.2	27.7	28.6	29.1	24.2	25.1	24.6	25.5	25.9
4H	27.8	28.7	28.3	29.1	29.5	24.8	25.7	25.3	26.1	26.6
6H	28.2	28.9	28.7	29.4	29.9	25.3	26.0	25.7	26.5	26.9
8H	28.3	29.0	28.8	29.4	29.9	25.4	26.1	25.8	26.5	27.0
12H	28.4	29.0	28.8	29.5	29.9	25.4	26.0	25.9	26.5	27.0
8H 4H	27.9	28.6	28.4	29.0	29.5	25.2	25.9	25.7	26.3	26.8
6H	28.4	28.9	28.9	29.4	29.9	25.7	26.3	26.2	26.8	27.3
8H	28.5	29.0	29.0	29.5	30.0	25.9	26.4	26.4	26.9	27.4
12H	28.6	29.1	29.2	29.6	30.2	25.9	26.4	26.4	26.9	27.4
12H 4H	27.9	28.5	28.4	29.0	29.5	25.2	25.8	25.7	26.3	26.8
6H	28.4	28.9	28.9	29.3	29.9	25.8	26.3	26.3	26.8	27.3
8H	28.6	29.0	29.1	29.5	30.1	26.0	26.4	26.5	26.9	27.5
CIE190: 2010										

CIE190: 2010
Area: 0.39968 m2

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


UTILIZATION FACTORS TABLE

REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	60	54	69	60	54	68	59	54	48
0.80	79	69	63	78	69	63	76	68	63	57
1.00	86	77	71	85	76	71	83	77	70	64
1.25	92	83	78	90	83	77	88	81	77	71
1.50	96	88	83	94	87	82	92	86	81	75
2.00	101	94	89	99	93	89	96	91	87	80
2.50	104	98	93	102	97	92	99	94	90	83
3.00	106	101	97	104	100	96	101	97	94	86
4.00	110	105	102	107	103	100	103	100	98	89
5.00	111	108	105	109	106	103	105	102	100	92
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004						Suspended			SHRNOM = 1.25	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators: LYJ
 Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4548]
 Remarks:


ISOCANDELA DIAGRAM

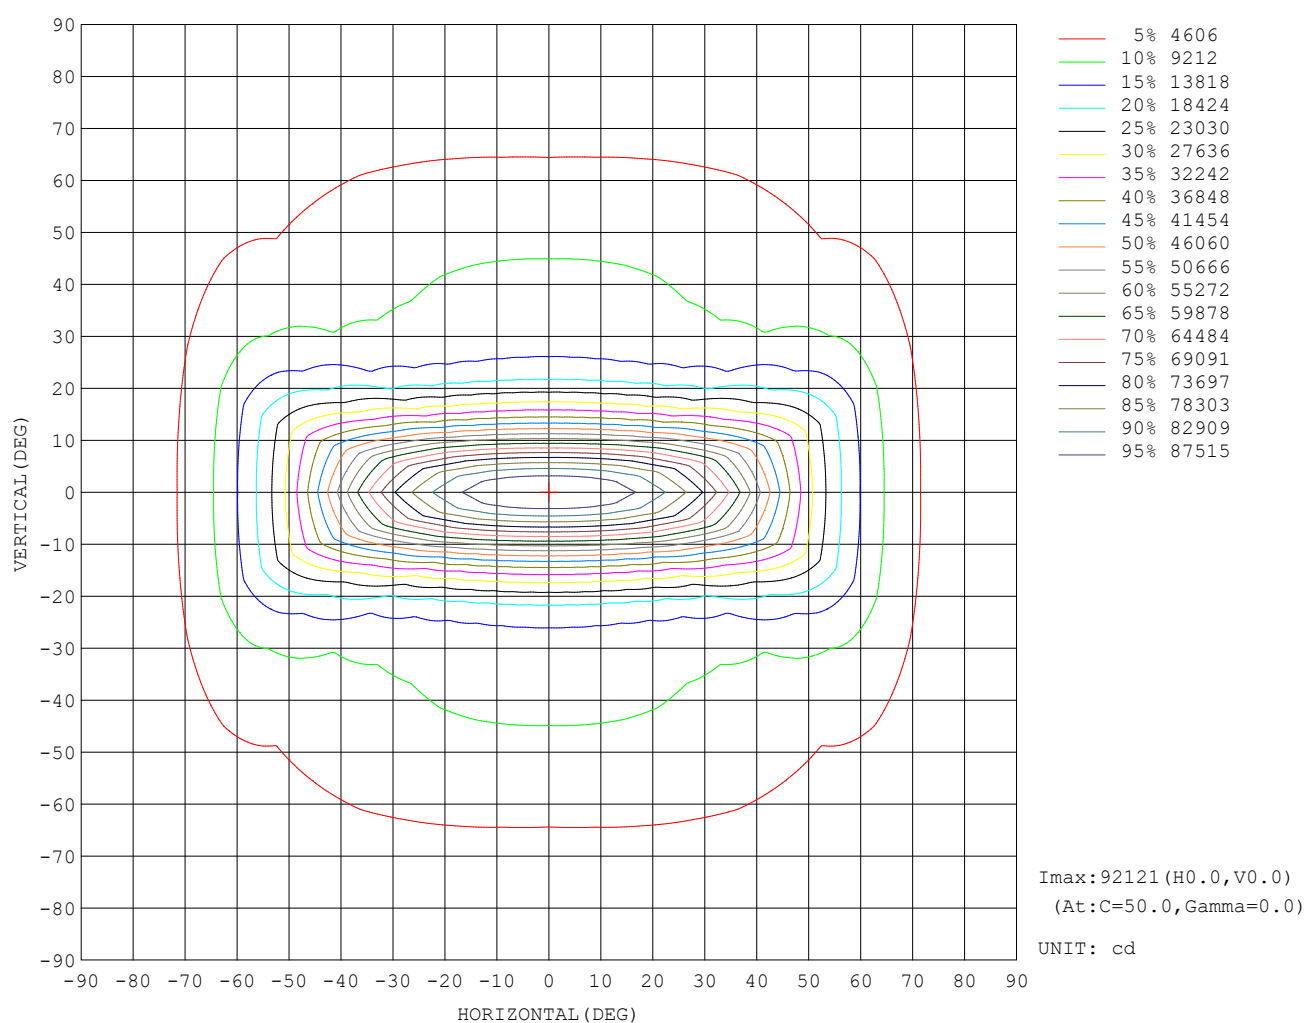

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

AAI Figure

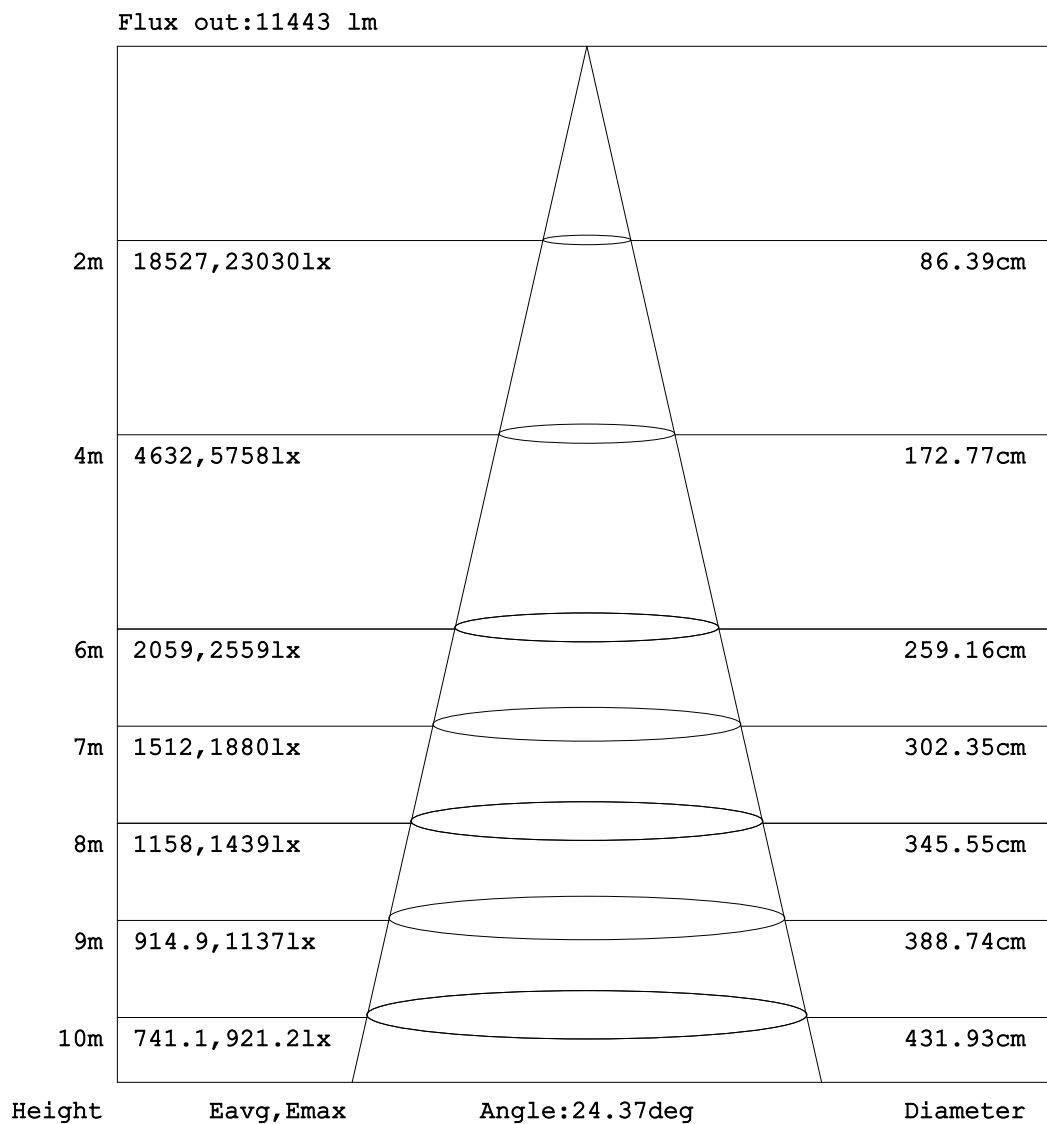


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:LYJ
Test Date:2022-08-02

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOLUX DIAGRAM

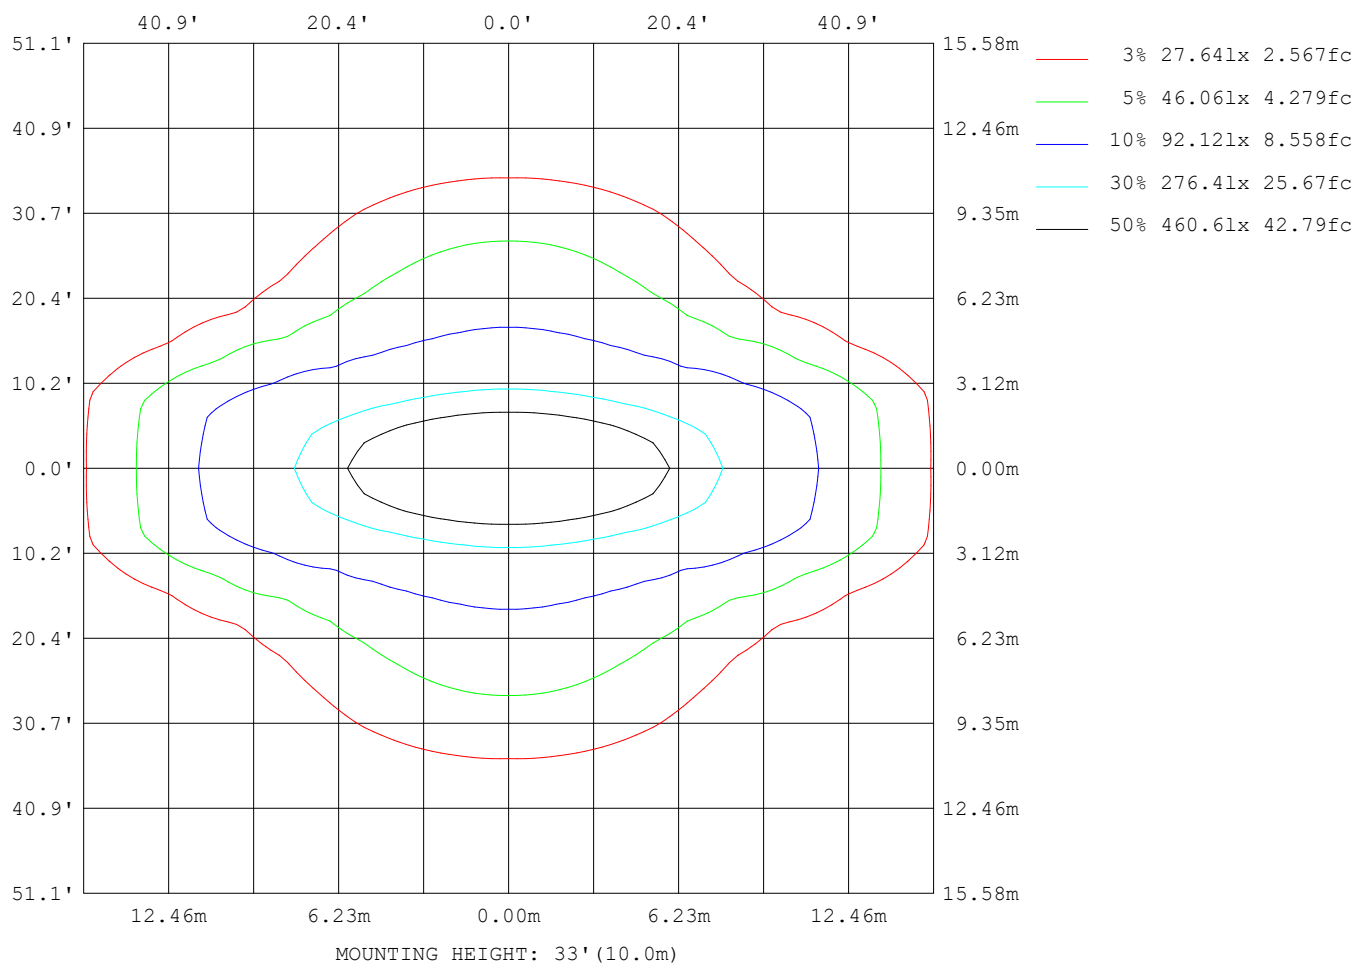

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

Planar Illuminance Curve

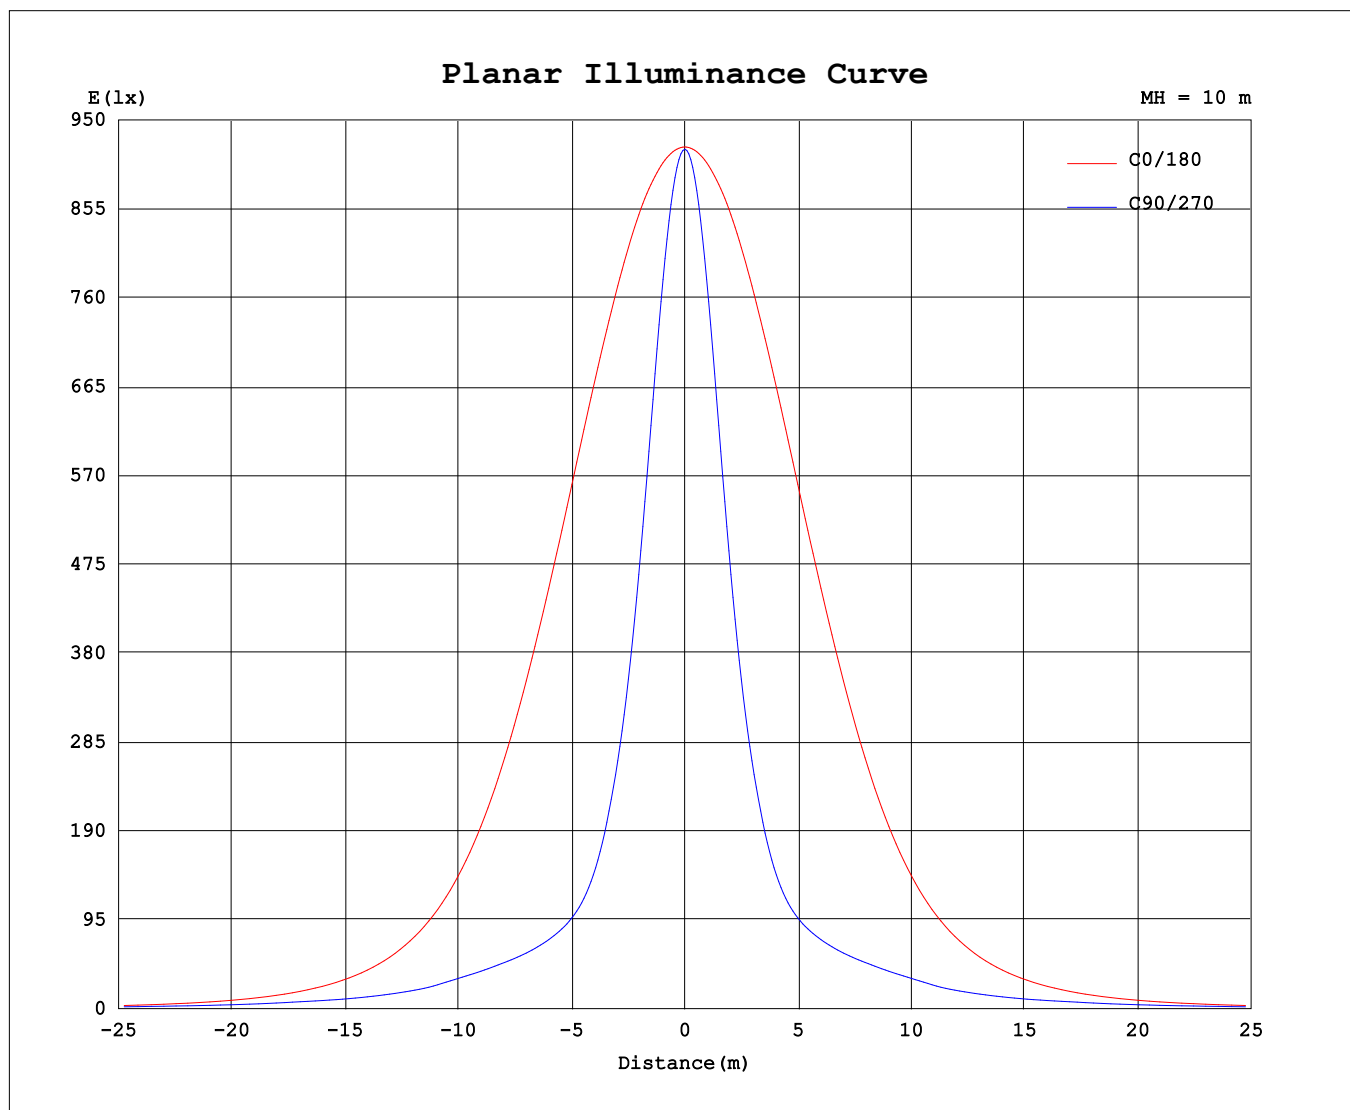

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3°C
Operators: LYJ
Test Date: 2022-08-02

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4548]
Remarks:

UNIT: X10cd

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 10.0DEG	γ Interval: 0.5DEG
Test Speed: HIGH	Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Temperature: 25.3°C	Humidity: 65.0%
Operators: LYJ	Test Distance: 26.000m [K=0.4548]
Test Date: 2022-08-02	Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

```

LUMINOUS DISTRIBUTION INTENSITY DATA

Table--2

UNIT: X10cd

[illegible]

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3℃
Operators:LYJ
Test Date:2022-08-02

```

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4548]
Remarks:

```