


EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:230.0V I:1.3079A P:299.60W PF:0.9959 Freq:50.01Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:34365x1 lm		
NAME: LHB09-300-5070-L03902+GRID28	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.70 lm/W			
MODEL	/	I _{max} (cd)	31174	S/MH (C0/180)	1.05
NOMINAL POWER(W)	/	LOR(%)	100.0	S/MH (C90/270)	1.02
RATED VOLTAGE(V)	/	TOTAL FLUX (lm)	34365	η UP,DN (C0-180)	0.0,50.0
NOMINAL FLUX(lm)	34365	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.0
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.00
TEST VOLTAGE (V)	230	η down (%)	100.0	CIBSE SHR MAX	1.05

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

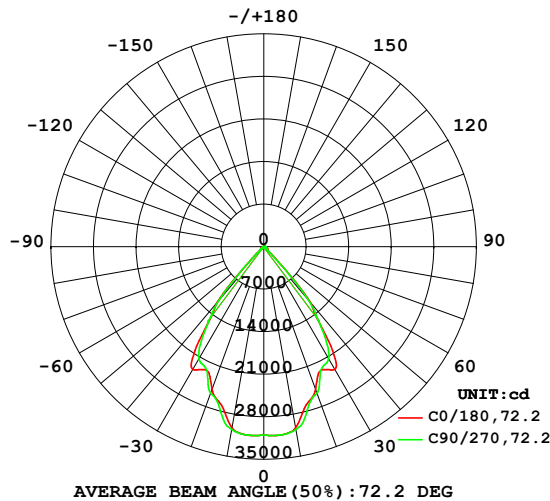

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

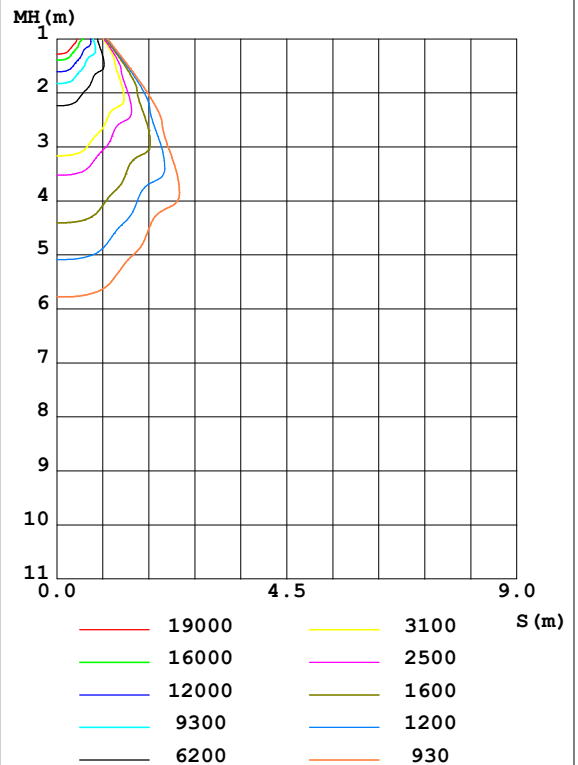

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LYJ
Test Date:2021-10-11

γ Range: 0 - 90DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4538]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	3026	3088	3055	3088	3026	3088	3055	3088	0- 10	2960	2960	8.61,8.61
20	2494	2495	2565	2495	2494	2495	2565	2495	10- 20	7899	10858	31.6,31.6
30	2333	1859	2133	1859	2333	1859	2133	1859	20- 30	10445	21303	62,62
40	1192	774.3	1142	774.3	1192	774.3	1142	774.3	30- 40	9924	31228	90.9,90.9
50	75.98	67.37	60.63	67.37	75.98	67.37	60.63	67.37	40- 50	2495	33723	98.1,98.1
60	43.99	26.75	25.08	26.75	43.99	26.75	25.08	26.75	50- 60	391.6	34114	99.3,99.3
70	22.89	8.834	7.059	8.834	22.89	8.834	7.059	8.834	60- 70	183.8	34298	99.8,99.8
80	3.540	2.099	1.754	2.099	3.540	2.099	1.754	2.099	70- 80	56.47	34355	100,100
90	0.0612	0.0677	0.0477	0.0677	0.0612	0.0677	0.0477	0.0677	80- 90	10.36	34365	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 33291 lm

%lum = 96.9%

%lamp = 96.9%

Conical surface Flux(120deg): 34114 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LYJ
Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4538]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

LUMINANCE LIMITATION CURVES

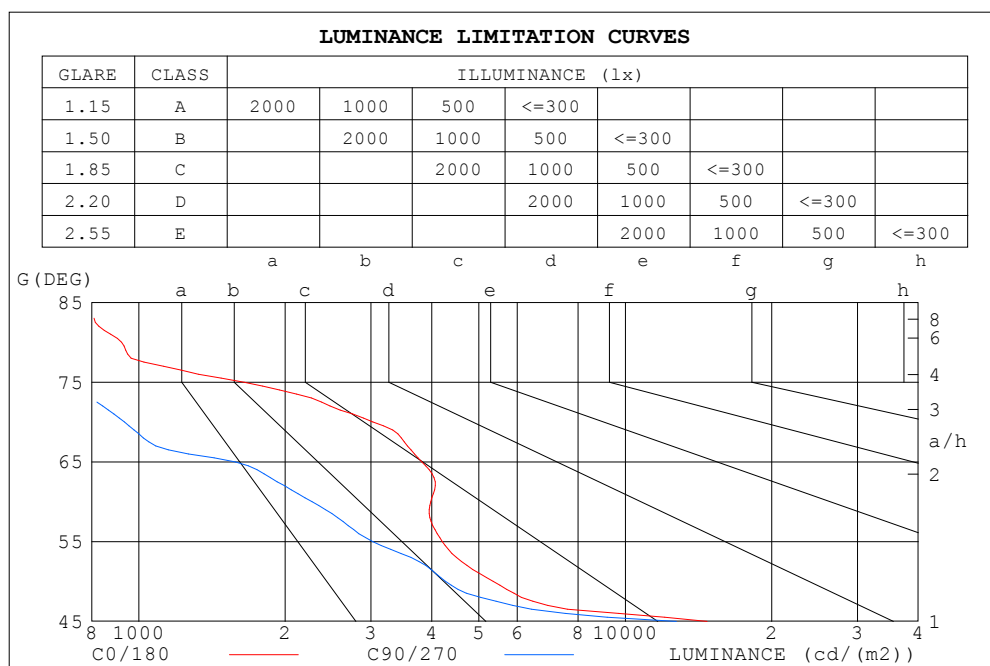

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	727	365
80	922	457
75	1646	634
70	3028	934
65	3818	1580
60	3981	2270
55	4205	3028
50	5349	4268
45	14724	12742


C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LYJ
 Test Date: 2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4538]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.02	.98	.94	1.00	.97	.93	.97	.94	.91	.94	.92	.89	.91	.89	.87	.86
3.0	.95	.89	.85	.93	.88	.85	.91	.87	.83	.88	.85	.82	.86	.83	.81	.79
4.0	.88	.82	.78	.87	.81	.77	.85	.80	.76	.83	.79	.75	.81	.77	.74	.73
5.0	.82	.76	.71	.81	.75	.71	.79	.74	.70	.77	.73	.70	.76	.72	.69	.67
6.0	.76	.70	.65	.75	.70	.65	.74	.69	.65	.72	.68	.64	.71	.67	.64	.62
7.0	.71	.65	.60	.71	.65	.60	.69	.64	.60	.68	.63	.60	.67	.63	.59	.58
8.0	.67	.60	.56	.66	.60	.56	.65	.60	.56	.64	.59	.55	.63	.59	.55	.54
9.0	.63	.56	.52	.62	.56	.52	.61	.56	.52	.60	.55	.52	.59	.55	.51	.50
10.0	.59	.53	.49	.58	.53	.49	.58	.52	.48	.57	.52	.48	.56	.51	.48	.47

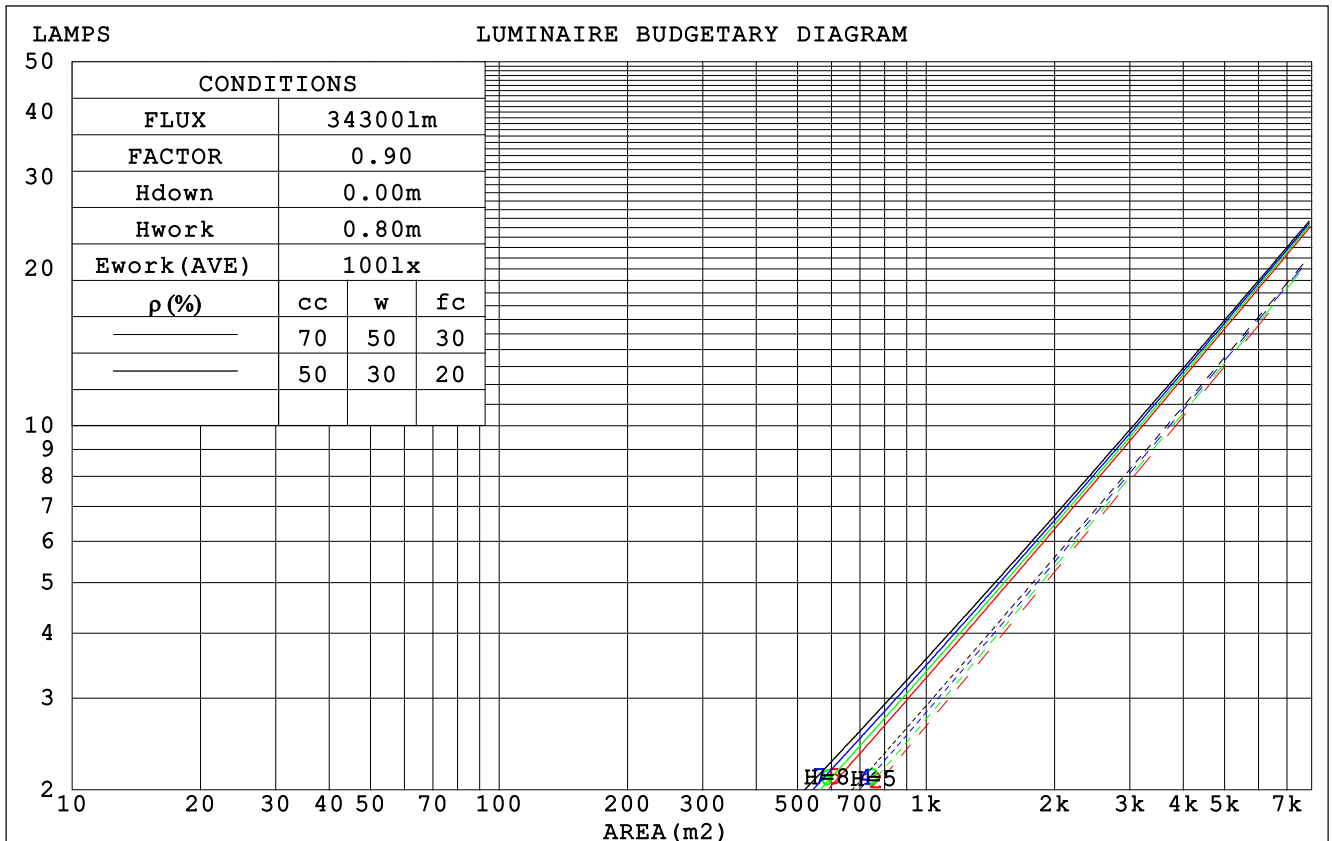

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LYJ
 Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4538]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

WEC AND CCEC

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.186	.106	.034	.179	.102	.032	.167	.096	.031	.155	.089	.029	.144	.084	.027		
2.0	.180	.098	.030	.174	.096	.029	.163	.091	.028	.153	.086	.027	.144	.082	.026		
3.0	.172	.091	.027	.167	.089	.027	.158	.086	.026	.149	.082	.025	.141	.078	.024		
4.0	.164	.085	.025	.160	.084	.025	.152	.081	.024	.145	.078	.023	.138	.075	.023		
5.0	.157	.080	.023	.153	.079	.023	.146	.076	.022	.140	.074	.022	.134	.071	.021		
6.0	.150	.075	.022	.147	.074	.021	.140	.072	.021	.135	.070	.021	.129	.068	.020		
7.0	.143	.071	.020	.140	.070	.020	.135	.068	.020	.130	.067	.019	.125	.065	.019		
8.0	.137	.067	.019	.135	.066	.019	.130	.065	.019	.125	.063	.018	.121	.062	.018		
9.0	.131	.064	.018	.129	.063	.018	.125	.062	.017	.121	.060	.017	.117	.059	.017		
10.0	.126	.060	.017	.124	.060	.017	.120	.059	.017	.116	.058	.016	.113	.057	.016		

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.135	.114	.096	.092	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.136	.099	.071	.117	.086	.062	.080	.060	.043	.046	.035	.026	.015	.011	.008	
5.0	.128	.088	.058	.110	.076	.051	.076	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.121	.079	.048	.104	.068	.042	.072	.048	.030	.042	.028	.018	.013	.009	.006	
7.0	.114	.071	.041	.098	.062	.036	.068	.043	.025	.040	.025	.015	.013	.008	.005	
8.0	.109	.065	.035	.094	.056	.030	.065	.040	.022	.038	.023	.013	.012	.008	.004	
9.0	.104	.060	.030	.090	.052	.026	.062	.037	.019	.036	.022	.011	.012	.007	.004	
10.0	.099	.056	.026	.086	.048	.023	.060	.034	.016	.035	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:LYJ
 Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:26.000m [K=0.4538]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UGR(Unified Glare Rating) Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	7.6	8.6	8.0	8.9	9.2	5.5	6.5	5.9	6.8	7.1
3H	8.9	9.8	9.3	10.1	10.5	5.7	6.6	6.1	6.9	7.3
4H	9.1	9.9	9.5	10.3	10.7	5.8	6.6	6.2	6.9	7.3
6H	9.1	9.8	9.5	10.2	10.6	5.7	6.5	6.2	6.9	7.3
8H	9.1	9.8	9.5	10.2	10.6	5.7	6.4	6.2	6.8	7.2
12H	9.0	9.7	9.5	10.1	10.5	5.7	6.3	6.1	6.7	7.2
4H 2H	7.6	8.4	8.0	8.7	9.1	5.7	6.5	6.1	6.8	7.2
3H	8.9	9.6	9.3	10.0	10.4	6.0	6.6	6.4	7.0	7.4
4H	9.1	9.7	9.6	10.2	10.6	6.0	6.6	6.5	7.0	7.5
6H	9.2	9.7	9.7	10.1	10.6	6.0	6.5	6.5	7.0	7.5
8H	9.2	9.6	9.6	10.1	10.6	6.0	6.5	6.5	6.9	7.4
12H	9.1	9.5	9.6	10.0	10.5	6.0	6.4	6.5	6.9	7.3
8H 4H	9.0	9.5	9.5	9.9	10.4	6.0	6.5	6.5	6.9	7.4
6H	9.1	9.4	9.6	9.9	10.4	6.0	6.4	6.5	6.9	7.4
8H	9.1	9.4	9.6	9.9	10.4	6.0	6.3	6.5	6.9	7.4
12H	9.1	9.3	9.6	9.8	10.4	6.0	6.3	6.5	6.8	7.4
12H 4H	9.0	9.4	9.4	9.8	10.3	6.0	6.4	6.5	6.9	7.3
6H	9.0	9.3	9.5	9.8	10.4	6.0	6.3	6.5	6.8	7.3
8H	9.0	9.3	9.5	9.8	10.4	6.0	6.3	6.5	6.8	7.4
CIE190: 2010										

CIE190: 2010
Area: 0.221 m2

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LYJ
Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4538]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT

UTILIZATION FACTORS TABLE


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	85	79	75	71
0.80	94	87	84	93	87	83	92	86	83	79
1.00	98	93	89	98	92	89	96	92	88	84
1.25	103	97	94	101	97	93	100	95	92	88
1.50	105	100	97	104	100	97	102	98	95	91
2.00	108	104	101	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	112	108	105	110	107	104	106	104	102	96
4.00	114	111	108	112	109	107	108	106	104	97
5.00	115	112	111	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 10.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: LYJ
 Test Date: 2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 26.000m [K=0.4538]
 Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOCANDELA DIAGRAM

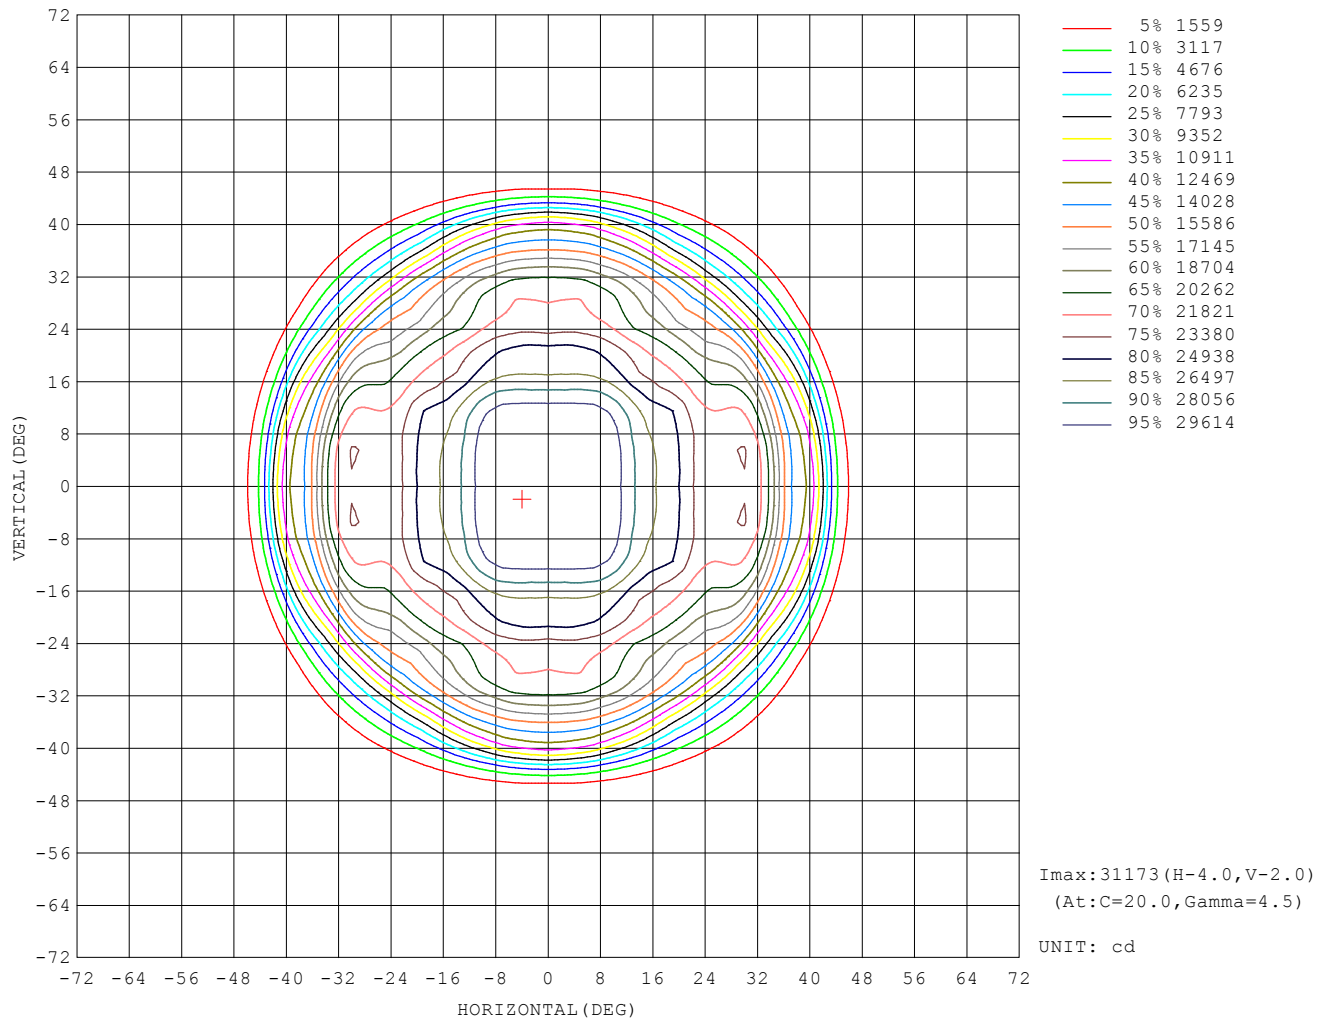

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LYJ
Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4538]
Remarks:

AAI Figure

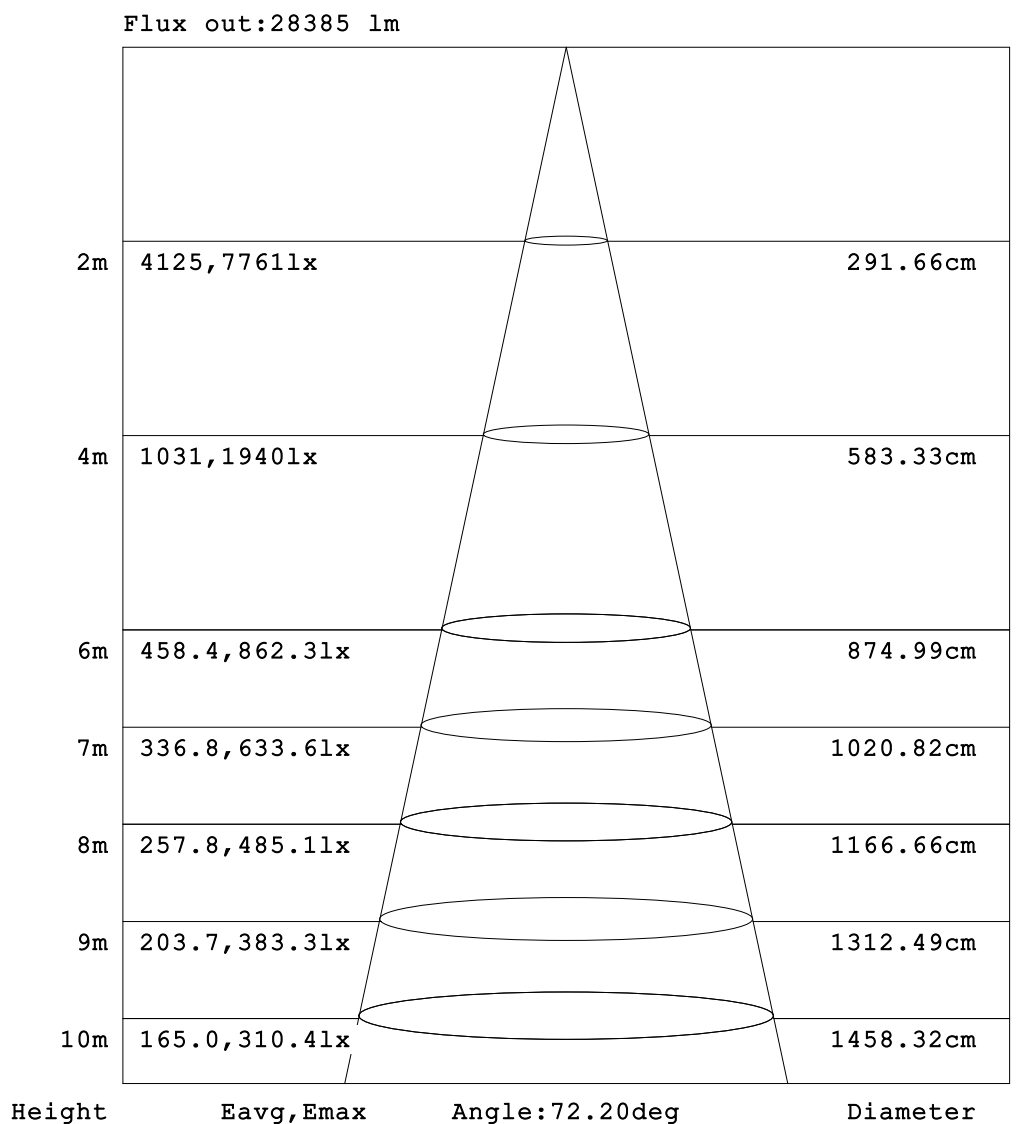


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:LYJ
Test Date:2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:26.000m [K=0.4538]
Remarks:

EVERFINE GONIOPHOTOMETERS SYSTEM TEST REPORT


ISOLUX DIAGRAM

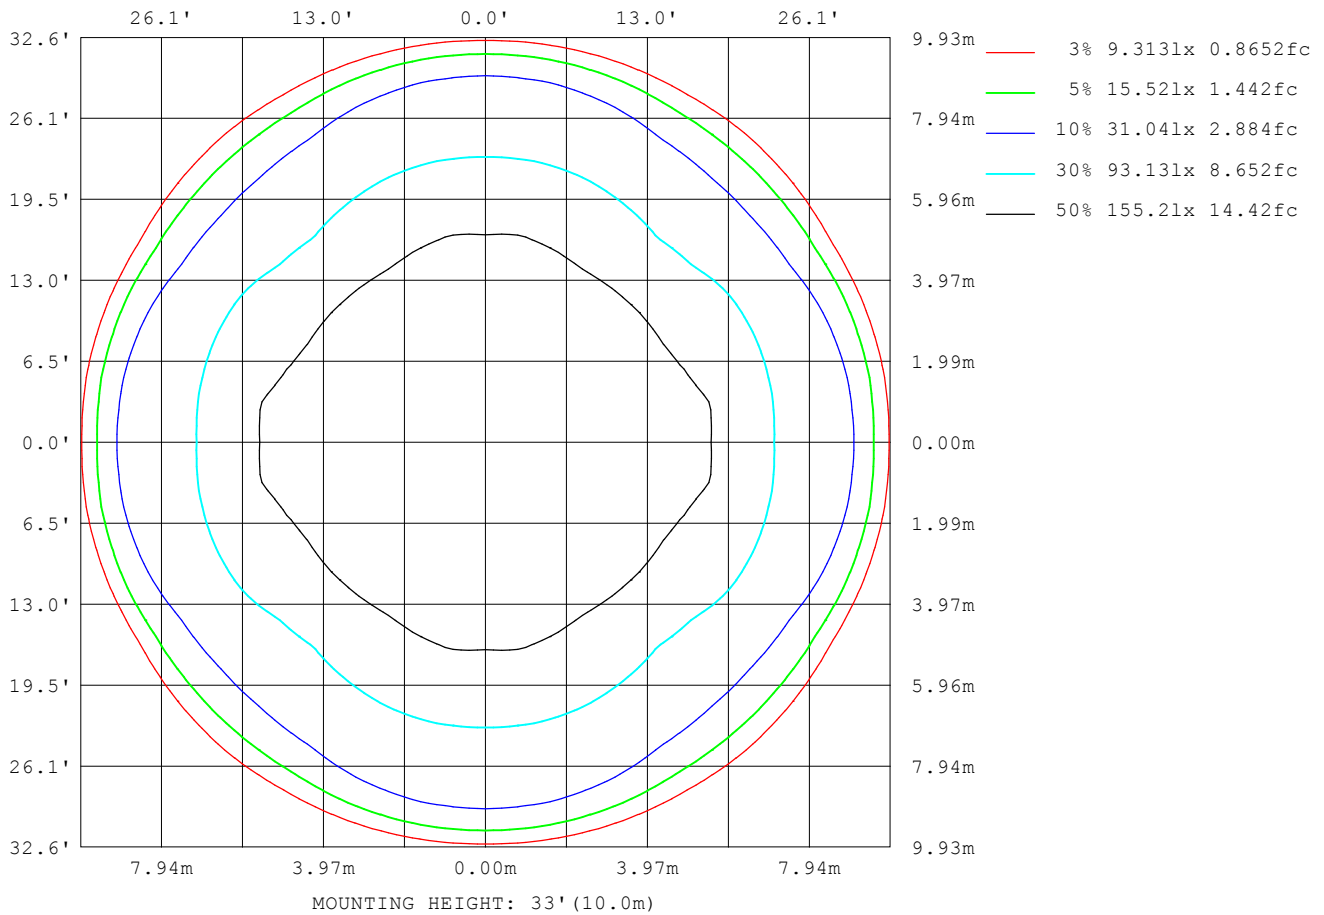

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LYJ
Test Date: 2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4538]
Remarks:

Planar Illuminance Curve

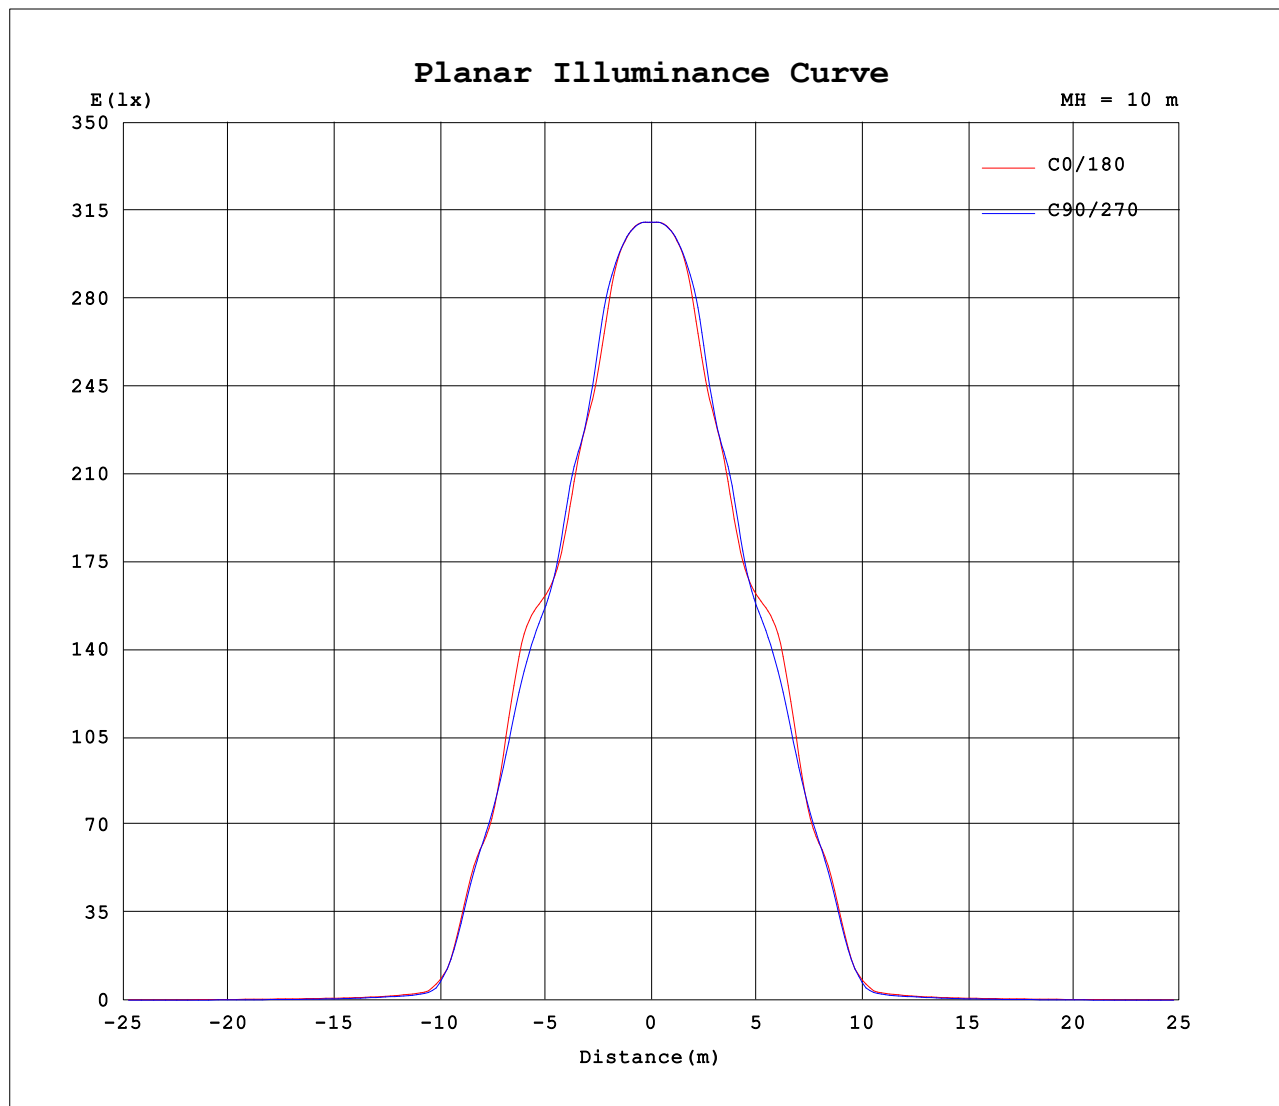

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: LYJ
Test Date: 2021-10-11

γ Range: 0 - 90DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 26.000m [K=0.4538]
Remarks: